

**Europe development & distribution:**

Cascoo Europe GmbH  
Lütke Haar 15  
59602 Rürthen  
Germany  
Tel.: 0049 (0) 2952 9706290  
E-Mail: [info@cascoo.eu](mailto:info@cascoo.eu)  
Internet: <http://www.cascoo.eu>

**China manufacturing base:**

Zhongshan Cascoo Metal Machinery Co., Ltd:  
Address: No. 108 Zhaoyi Road, Dongsheng Town, Zhongshan, Guangdong, China  
Post Code: 528414  
TEL: +86 (0)760 89821559  
FAX: +86 (0)760 89821556  
EMAIL: [sales@cascoo.com](mailto:sales@cascoo.com)  
Internet: <http://www.cascoo.com>



# We Move Your Life

castors & wheels 2018/2019







**05**  
Company Introduction

**09**  
Apparatus Castors

**21**  
Shopping castors

**25**  
Industrial Castors

**67**  
Heavy Duty Castors

**79**  
Stainless Steel Castors

**87**  
Waste Bin Castors

**93**  
Item No.Declaration



## CASCOO. China.

Zhongshan CASCOO Metal Machinery Co. Ltd, based on technological innovation and scientific management, is an intellectually designing & manufacturing enterprise of castors and wheels. CASCOO is one of the leading brands in the European castor market. CASCOO combines the words CASTor and COOperation. "Cooperation" not only refers to the dealings with customers, but also internally to contacts within the CASCOO Group and its employees.

In 2013, CASCOO was founded in Xiaolan, Zhongshan, Guangdong Province. Two years later CASCOO completed its modern artistic plant building, which was designed and built by an artist and his architectural team. CASCOO's modern plant building provides more than 20,000 sqm. Our ability includes R&D, tooling, injection molding, metal stamping, die casting, fully automatic production lines for elastic rubber and polyurethane and finally quick assembly lines. CASCOO is well equipped with laboratories. All these made CASCOO the well-known brand name in the world castor market, which received highly reputation on castor design, cost control, QA and technic. The monthly capacity is around 40 ISO containers.

In 2016, CASCOO China was officially rated and successfully identified as high-tech enterprise by Guangdong provincial government. The blue elastic rubber castor for example is one of CASCOO's flagships due to its excellent performance and low noise characteristics.

CASCOO has unique marketing strategy. It is the very first Chinese castor company setting up a branch in Europe to distribute products to the European market. The distribution center in Germany provides around 8,000 sqm. CASCOO has attracted attention quickly because no brand ever has entered the European markets so determined, quickly and successfully.





## CASCOO. Europe.

CASCOO Europe GmbH, parallel to the facility in Xiaolan / China, was also established in 2013 and is directly linked to the manufacturer. The registered office of the company is located in Ruethen, in the middle of Germany. CASCOO Europe expanded within the past years to a well-known distribution center which is distinguished by good service and fast deliveries. Through the newly built high-bay warehouse, which was finished end of 2015, CASCOO Europe has storage capacities of more than 4.000 pallets spread over 8,000 sqm. Both the procurement of direct containers from China as well as the support of replacement business from Germany are part of the everyday business for CASCOO Europe. The German head office is also coordinating several agencies and partners within Europe. The flexibility and closeness to our customers is just as important to us as the constant exchange with CASCOO China regarding development, delivery times and expansion of resources. CASCOO Europe's goal is a lean administrative structure without compromising expertise. This and other major advantages against the competition, e.g. the direct contact to China, allow the company to grow at the desired speed.






CASCOO. Apparatus Castors.



Apparatus castors are widely used in medical centers, retail shops and hotel industry. Excellent appearance and smooth moving are its characteristic by update design and different wheel option.

**CASCOO. Apparatus Castors. Light Apparatus.  
Series P2T2**



Rim: Polypropylene  
 Tread: Thermoplastic Rubber 95° Shore A  
 Bearing: Plain bearing / Single ball bearing  
 Threadguard: Without / Small plastic threadguard  
 Load capacities: 50kg - 75kg  
 Diameters: 50 mm - 75 mm  
 Temperature Range: - 20° C - + 60° C



| swivel castor                          |     |       |             |     |    |     |    |    |
|--|-----|-------|-------------|-----|----|-----|----|----|
|  | mm  | mm    | mm          | mm  | mm | mm  | mm | Kg |
| SAPA9C0050P2T2PON<br>SAPA9C0050P2T2B42 | 050 | 60X60 | 48/39X48/39 | 6.3 | 25 | 70  |    | 50 |
| SAPA2C0075P2T2PON<br>SAPA2C0075P2T2B42 | 075 | 60X60 | 48/39X48/39 | 6.3 | 25 | 100 |    | 75 |



| fixed castor                           |     |       |                 |     |    |     |    |
|--|-----|-------|-----------------|-----|----|-----|----|
|  | mm  | mm    | mm              | mm  | mm | mm  | Kg |
| FAPBCC0050P2T2PON<br>FAPBCC0050P2T2B42 | 050 | 55X55 | 44/38.5X44/38.5 | 6.3 |    | 70  | 50 |
| FAPCCC0075P2T2PON<br>FAPCCC0075P2T2B42 | 075 | 67X60 | 48/38X48/38     | 6.3 |    | 100 | 75 |




| swivel castor with total brake         |     |       |             |     |    |     |    |    |
|--|-----|-------|-------------|-----|----|-----|----|----|
|  | mm  | mm    | mm          | mm  | mm | mm  | mm | Kg |
| TAPA9C0050P2T2PON<br>TAPA9C0050P2T2B42 | 050 | 60X60 | 48/39X48/39 | 6.3 | 25 | 70  | 80 | 50 |
| TAPA2C0075P2T2PON<br>TAPA2C0075P2T2B42 | 075 | 60X60 | 48/39X48/39 | 6.3 | 25 | 100 | 80 | 75 |



| wheel only               |     |    |    |    |    |    |
|--------------------------|-----|----|----|----|----|----|
|                          | mm  | mm | mm | mm | Ø  | Kg |
| 050P2T2PON<br>050P2T2B42 | 050 | 19 | 22 | 8  | M6 | 50 |
| 075P2T2PON<br>075P2T2B42 | 075 | 25 | 28 | 8  | M6 | 75 |



**CASCOO. Apparatus Castors. Light Apparatus.  
Series P2T2**



Rim: Polypropylene  
 Tread: Thermoplastic Rubber 95° Shore A  
 Bearing: Plain bearing / Single ball bearing  
 Threadguard: Without / Small plastic threadguard  
 Load capacities: 50kg - 75kg  
 Diameters: 50 mm - 75 mm  
 Temperature Range: - 20° C - + 60° C



| swivel castor with bolt hole           |     |    |    |    |     |    |
|--|-----|----|----|----|-----|----|
|  | mm  | mm | mm | mm | mm  | Kg |
| HAH19C0050P2T2PON<br>HAH19C0050P2T2B42 | 050 | 11 |    | 25 | 70  | 50 |
| HAH12C0075P2T2PON<br>HAH12C0075P2T2B42 | 075 | 11 |    | 25 | 100 | 75 |



| swivel castor with bolt hole total brake |     |    |    |    |     |    |    |
|--|-----|----|----|----|-----|----|----|
|  | mm  | mm | mm | mm | mm  | mm | Kg |
| BAH19C0050P2T2PON<br>BAH19C0050P2T2B42   | 050 | 11 |    | 25 | 70  | 80 | 50 |
| BAH12C0075P2T2PON<br>BAH12C0075P2T2B42   | 075 | 11 |    | 25 | 100 | 80 | 75 |



| swivel castor with bolt hole           |     |    |       |    |     |    |    |
|--|-----|----|-------|----|-----|----|----|
|  | mm  | mm | mm    | mm | mm  | mm | Kg |
| HAZ19C0050P2T2PON<br>HAZ19C0050P2T2B42 | 050 | 11 | 11x31 | 25 | 70  |    | 50 |
| HAZ12C0075P2T2PON<br>HAZ12C0075P2T2B42 | 075 | 11 | 11x31 | 25 | 100 |    | 75 |




| swivel castor with bolt hole total brake |     |    |       |    |     |    |    |
|--|-----|----|-------|----|-----|----|----|
|  | mm  | mm | mm    | mm | mm  | mm | Kg |
| BAZ19C0050P2T2PON<br>BAZ19C0050P2T2B42   | 050 | 11 | 11x31 | 25 | 70  | 80 | 50 |
| BAZ12C0075P2T2PON<br>BAZ12C0075P2T2B42   | 075 | 11 | 11x31 | 25 | 100 | 80 | 75 |

CASCOO. Apparatus Castors. Heavy Apparatus. Series P2T2



Rim: Polypropylene  
 Tread: Thermoplastic Rubber 95° Shore A  
 Bearing: Plain bearing  
 Threadguard: Without  
 Load capacities: 80kg - 100kg  
 Diameters: 80 mm - 150 mm  
 Temperature Range: - 20° C - + 60° C



| swivel castor     |     |       |                   |     |    |     |    |     |
|-------------------|-----|-------|-------------------|-----|----|-----|----|-----|
|                   | mm  | mm    | mm                | mm  | mm | mm  | mm | Kg  |
| SAPE5C0080P2T2P0N | 080 | 77X67 | 61.5/56X51.5/46.5 | 8.5 | 37 | 111 |    | 80  |
| SAPE5C0100P2T2P0N | 100 | 77X67 | 61.5/56X51.5/46.5 | 8.5 | 37 | 135 |    | 100 |
| SAPE5C0125P2T2P0N | 125 | 77X67 | 61.5/56X51.5/46.5 | 8.5 | 40 | 160 |    | 100 |
| SAPI5C0125P2T2P0N | 125 | 95X70 | 75X50             | 11  | 40 | 160 |    | 100 |
| SAPE5C0150P2T2P0N | 150 | 77X67 | 61.5/56X51.5/46.5 | 8.5 | 40 | 185 |    | 100 |



| fixed castor      |     |       |                   |     |    |     |     |
|-------------------|-----|-------|-------------------|-----|----|-----|-----|
|                   | mm  | mm    | mm                | mm  | mm | mm  | Kg  |
| FAPE5C0080P2T2P0N | 080 | 77X67 | 61.5/56X51.5/46.5 | 8.5 |    | 111 | 80  |
| FAPE5C0100P2T2P0N | 100 | 77X67 | 61.5/56X51.5/46.5 | 8.5 |    | 135 | 100 |
| FAPE5C0125P2T2P0N | 125 | 77X67 | 61.5/56X51.5/46.5 | 8.5 |    | 160 | 100 |
| FAPI5C0125P2T2P0N | 125 | 95X70 | 75X50             | 11  |    | 160 | 100 |
| FAPE5C0150P2T2P0N | 150 | 77X67 | 61.5/56X51.5/46.5 | 8.5 |    | 185 | 100 |



| swivel castor with total brake (aluminium pedal) |     |       |                   |     |    |     |     |     |
|--|-----|-------|-------------------|-----|----|-----|-----|-----|
|  | mm  | mm    | mm                | mm  | mm | mm  | mm  | Kg  |
| TAPE5C0080P2T2P0N                                | 080 | 77X67 | 61.5/56X51.5/46.5 | 8.5 | 37 | 111 | 132 | 80  |
| TAPE5C0100P2T2P0N                                | 100 | 77X67 | 61.5/56X51.5/46.5 | 8.5 | 37 | 135 | 132 | 100 |
| TAPE5C0125P2T2P0N                                | 125 | 77X67 | 61.5/56X51.5/46.5 | 8.5 | 40 | 160 | 132 | 100 |
| TAPI5C0125P2T2P0N                                | 125 | 95X70 | 75X50             | 11  | 40 | 160 | 132 | 100 |
| TAPE5C0150P2T2P0N                                | 150 | 77X67 | 61.5/56X51.5/46.5 | 8.5 | 40 | 185 | 132 | 100 |



| swivel castor with total brake (plastic pedal) |     |       |                   |     |    |     |     |     |
|--|-----|-------|-------------------|-----|----|-----|-----|-----|
|  | mm  | mm    | mm                | mm  | mm | mm  | mm  | Kg  |
| PAPE5C0100P2T2P0N                              | 100 | 77X67 | 61.5/56X51.5/46.5 | 8.5 | 37 | 135 | 132 | 100 |
| PAPE5C0125P2T2P0N                              | 125 | 77X67 | 61.5/56X51.5/46.5 | 8.5 | 40 | 160 | 132 | 100 |
| PAPI5C0125P2T2P0N                              | 125 | 95X70 | 75X50             | 11  | 40 | 160 | 132 | 100 |
| PAPE5C0150P2T2P0N                              | 150 | 77X67 | 61.5/56X51.5/46.5 | 8.5 | 40 | 185 | 132 | 100 |

CASCOO. Apparatus Castors. Heavy Apparatus. Series P2T2



Rim: Polypropylene  
 Tread: Thermoplastic Rubber 95° Shore A  
 Bearing: Plain bearing  
 Threadguard: Without  
 Load capacities: 80kg - 100kg  
 Diameters: 80 mm - 150 mm  
 Temperature Range: - 20° C - + 60° C



| swivel castor with bolt hole |     |    |    |    |    |     |     |
|------------------------------|-----|----|----|----|----|-----|-----|
|                              | mm  | mm | mm | mm | mm | mm  | Kg  |
| HAH15C0080P2T2P0N            | 080 |    |    |    | 37 | 111 | 80  |
| HAH15C0100P2T2P0N            | 100 |    |    |    | 37 | 135 | 100 |
| HAH15C0125P2T2P0N            | 125 |    |    |    | 40 | 160 | 100 |
| HAH15C0150P2T2P0N            | 150 |    |    |    | 40 | 185 | 100 |



| swivel castor with bolt hole with total brake (aluminium pedal) |     |    |    |    |    |     |     |     |
|---|-----|----|----|----|----|-----|-----|-----|
|   | mm  | mm | mm | mm | mm | mm  | mm  | Kg  |
| BAH15C0080P2T2P0N   | 080 |    |    |    | 37 | 111 | 132 | 80  |
| BAH15C0100P2T2P0N   | 100 |    |    |    | 37 | 135 | 132 | 100 |
| BAH15C0125P2T2P0N   | 125 |    |    |    | 40 | 160 | 132 | 100 |
| BAH15C0150P2T2P0N   | 150 |    |    |    | 40 | 185 | 132 | 100 |




| swivel castor with bolt hole with total brake (plastic pedal) |     |    |    |    |    |     |     |     |
|---|-----|----|----|----|----|-----|-----|-----|
|   | mm  | mm | mm | mm | mm | mm  | mm  | Kg  |
| KAH15C0100P2T2P0N   | 100 |    |    |    | 37 | 135 | 132 | 100 |
| KAH15C0125P2T2P0N   | 125 |    |    |    | 40 | 160 | 132 | 100 |
| KAH15C0150P2T2P0N   | 150 |    |    |    | 40 | 185 | 132 | 100 |



| wheel only |     |    |    |    |    |   |     |
|------------|-----|----|----|----|----|---|-----|
|            | mm  | mm | mm | mm | mm | Ø | Kg  |
| 080P2T2P0N | 080 | 32 | 36 | 12 | M8 |   | 80  |
| 100P2T2P0N | 100 | 32 | 36 | 12 | M8 |   | 100 |
| 125P2T2P0N | 125 | 32 | 36 | 12 | M8 |   | 100 |
| 150P2T2P0N | 150 | 32 | 36 | 12 | M8 |   | 100 |

CASCOO. Apparatus Castors. Heavy Apparatus. Series P2T2



Rim: Polypropylene  
 Tread: Thermoplastic Rubber 95° Shore A  
 Bearing: Single ball bearing  
 Threadguard: Big plastic threadguard  
 Load capacities: 80kg - 100kg  
 Diameters: 80 mm - 150 mm  
 Temperature Range: - 20° C - + 60° C



| swivel castor     |     |       |                   |     |    |     |    |     |
|-------------------|-----|-------|-------------------|-----|----|-----|----|-----|
|                   | mm  | mm    | mm                | mm  | mm | mm  | mm | Kg  |
| SAPE5C0080P2T2B42 | 080 | 77X67 | 61.5/56X51.5/46.5 | 8.5 | 37 | 111 |    | 80  |
| SAPE5C0100P2T2B42 | 100 | 77X67 | 61.5/56X51.5/46.5 | 8.5 | 37 | 135 |    | 100 |
| SAPE5C0125P2T2B42 | 125 | 77X67 | 61.5/56X51.5/46.5 | 8.5 | 40 | 160 |    | 100 |
| SAPI5C0125P2T2B42 | 125 | 95X70 | 75X50             | 11  | 40 | 160 |    | 100 |
| SAPE5C0150P2T2B42 | 150 | 77X67 | 61.5/56X51.5/46.5 | 8.5 | 40 | 185 |    | 100 |



| fixed castor      |     |       |                   |     |    |     |    |     |
|-------------------|-----|-------|-------------------|-----|----|-----|----|-----|
|                   | mm  | mm    | mm                | mm  | mm | mm  | mm | Kg  |
| FAPE5C0080P2T2B42 | 080 | 77X67 | 61.5/56X51.5/46.5 | 8.5 |    | 111 |    | 80  |
| FAPE5C0100P2T2B42 | 100 | 77X67 | 61.5/56X51.5/46.5 | 8.5 |    | 135 |    | 100 |
| FAPE5C0125P2T2B42 | 125 | 77X67 | 61.5/56X51.5/46.5 | 8.5 |    | 160 |    | 100 |
| FAPI5C0125P2T2B42 | 125 | 95X70 | 75X50             | 11  |    | 160 |    | 100 |
| FAPE5C0150P2T2B42 | 150 | 77X67 | 61.5/56X51.5/46.5 | 8.5 |    | 185 |    | 100 |



| swivel castor with total brake (aluminium pedal) |     |       |                   |     |    |     |     |    |     |
|--|-----|-------|-------------------|-----|----|-----|-----|----|-----|
|  | mm  | mm    | mm                | mm  | mm | mm  | mm  | mm | Kg  |
| TAPE5C0080P2T2B42                                | 080 | 77X67 | 61.5/56X51.5/46.5 | 8.5 | 37 | 111 | 132 |    | 80  |
| TAPE5C0100P2T2B42                                | 100 | 77X67 | 61.5/56X51.5/46.5 | 8.5 | 37 | 135 | 132 |    | 100 |
| TAPE5C0125P2T2B42                                | 125 | 77X67 | 61.5/56X51.5/46.5 | 8.5 | 40 | 160 | 132 |    | 100 |
| TAPI5C0125P2T2B42                                | 125 | 95X70 | 75X50             | 11  | 40 | 160 | 132 |    | 100 |
| TAPE5C0150P2T2B42                                | 150 | 77X67 | 61.5/56X51.5/46.5 | 8.5 | 40 | 185 | 132 |    | 100 |



| swivel castor with total brake (plastic pedal) |     |       |                   |     |    |     |     |    |     |
|--|-----|-------|-------------------|-----|----|-----|-----|----|-----|
|  | mm  | mm    | mm                | mm  | mm | mm  | mm  | mm | Kg  |
| PAPE5C0100P2T2B42                              | 100 | 77X67 | 61.5/56X51.5/46.5 | 8.5 | 37 | 135 | 132 |    | 100 |
| PAPE5C0125P2T2B42                              | 125 | 77X67 | 61.5/56X51.5/46.5 | 8.5 | 40 | 160 | 132 |    | 100 |
| PAPI5C0125P2T2B42                              | 125 | 95X70 | 75X50             | 11  | 40 | 160 | 132 |    | 100 |
| PAPE5C0150P2T2B42                              | 150 | 77X67 | 61.5/56X51.5/46.5 | 8.5 | 40 | 185 | 132 |    | 100 |

CASCOO. Apparatus Castors. Heavy Apparatus. Series P2T2



Rim: Polypropylene  
 Tread: Thermoplastic Rubber 95° Shore A  
 Bearing: Single ball bearing  
 Threadguard: Big plastic threadguard  
 Load capacities: 80kg - 100kg  
 Diameters: 80 mm - 150 mm  
 Temperature Range: - 20° C - + 60° C



| swivel castor with bolt hole |     |    |    |    |    |     |    |     |
|------------------------------|-----|----|----|----|----|-----|----|-----|
|                              | mm  | mm | mm | mm | mm | mm  | mm | Kg  |
| HAH15C0080P2T2B42            | 080 | 11 |    |    | 37 | 111 |    | 80  |
| HAH15C0100P2T2B42            | 100 | 11 |    |    | 37 | 135 |    | 100 |
| HAH15C0125P2T2B42            | 125 | 11 |    |    | 40 | 160 |    | 100 |
| HAH15C0150P2T2B42            | 150 | 11 |    |    | 40 | 185 |    | 100 |



| swivel castor with total brake (aluminium pedal) |     |    |    |    |    |     |     |    |     |
|--|-----|----|----|----|----|-----|-----|----|-----|
|  | mm  | mm | mm | mm | mm | mm  | mm  | mm | Kg  |
| BAH15C0080P2T2B42                                | 080 | 11 |    |    | 37 | 111 | 132 |    | 80  |
| BAH15C0100P2T2B42                                | 100 | 11 |    |    | 37 | 135 | 132 |    | 100 |
| BAH15C0125P2T2B42                                | 125 | 11 |    |    | 40 | 160 | 132 |    | 100 |
| BAH15C0150P2T2B42                                | 150 | 11 |    |    | 40 | 185 | 132 |    | 100 |



| swivel castor with total brake (plastic pedal) |     |    |    |    |    |     |     |    |     |
|--|-----|----|----|----|----|-----|-----|----|-----|
|  | mm  | mm | mm | mm | mm | mm  | mm  | mm | Kg  |
| KAH15C0100P2T2B42                              | 100 | 11 |    |    | 37 | 135 | 132 |    | 100 |
| KAH15C0125P2T2B42                              | 125 | 11 |    |    | 40 | 160 | 132 |    | 100 |
| KAH15C0150P2T2B42                              | 150 | 11 |    |    | 40 | 185 | 132 |    | 100 |



| wheel only |     |    |    |    |    |    |    |     |
|------------|-----|----|----|----|----|----|----|-----|
|            | mm  | mm | mm | mm | mm | mm | mm | Kg  |
| 080P2T2B42 | 080 | 32 | 36 | 15 | M8 |    |    | 80  |
| 100P2T2B42 | 100 | 32 | 36 | 15 | M8 |    |    | 100 |
| 125P2T2B42 | 125 | 32 | 36 | 15 | M8 |    |    | 100 |
| 150P2T2B42 | 150 | 32 | 36 | 15 | M8 |    |    | 100 |

**CASCOO. Apparatus Castors. Heavy Apparatus. Series P2T2**



Rim: Polypropylene  
 Tread: Thermoplastic Rubber 95° Shore A  
 Bearing: Plain bearing  
 Threadguard: Without  
 Load capacities: 80kg - 100kg  
 Diameters: 80 mm - 150 mm  
 Temperature Range: - 20° C - + 60° C



| swivel castor with bolt hole | mm  | mm | mm    | mm | mm  | Kg  |
|------------------------------|-----|----|-------|----|-----|-----|
| HAX15C0080P2T2PON            | 080 | 11 | 19-35 | 37 | 111 | 80  |
| HAX15C0100P2T2PON            | 100 | 11 | 19-35 | 37 | 135 | 100 |
| HAX15C0125P2T2PON            | 125 | 11 | 19-35 | 40 | 160 | 100 |
| HAX15C0150P2T2PON            | 150 | 11 | 19-35 | 40 | 185 | 100 |



| swivel castor with total brake (aluminium pedal) | mm  | mm | mm    | mm | mm  | mm  | Kg  |
|--|-----|----|-------|----|-----|-----|-----|
| BAX15C0080P2T2PON                                | 080 | 11 | 19-35 | 37 | 111 | 132 | 80  |
| BAX15C0100P2T2PON                                | 100 | 11 | 19-35 | 37 | 135 | 132 | 100 |
| BAX15C0125P2T2PON                                | 125 | 11 | 19-35 | 40 | 160 | 132 | 100 |
| BAX15C0150P2T2PON                                | 150 | 11 | 19-35 | 40 | 185 | 132 | 100 |



| swivel castor with total brake (plastic pedal) | mm  | mm | mm    | mm | mm  | mm  | Kg  |
|--|-----|----|-------|----|-----|-----|-----|
| KAX15C0100P2T2PON                              | 100 | 11 | 19-35 | 37 | 135 | 132 | 100 |
| KAX15C0125P2T2PON                              | 125 | 11 | 19-35 | 40 | 160 | 132 | 100 |
| KAX15C0150P2T2PON                              | 150 | 11 | 19-35 | 40 | 185 | 132 | 100 |

| item code | tube type                | mounting size | screw        | material          |
|-----------|--------------------------|---------------|--------------|-------------------|
| EXRO1921  | expander for round tubes | 11mm          | screw M10x90 | aluminium / nylon |
| EXRO2124  | expander for round tubes | 11mm          | screw M10x90 | aluminium / nylon |
| EXRO2427  | expander for round tubes | 11mm          | screw M10x90 | aluminium / nylon |
| EXRO2730  | expander for round tubes | 11mm          | screw M10x90 | aluminium / nylon |
| EXRO3135  | expander for round tubes | 11mm          | screw M10x90 | aluminium / nylon |



**CASCOO. Apparatus Castors. Heavy Apparatus. Series P2T2**



Rim: Polypropylene  
 Tread: Thermoplastic Rubber 95° Shore A  
 Bearing: Single ball bearing  
 Threadguard: Big plastic threadguard  
 Load capacities: 80kg - 100kg  
 Diameters: 80 mm - 150 mm  
 Temperature Range: - 20° C - + 60° C



| swivel castor with bolt hole | mm  | mm | mm    | mm | mm  | Kg  |
|------------------------------|-----|----|-------|----|-----|-----|
| HAX15C0080P2T2B42            | 080 | 11 | 19-35 | 37 | 111 | 80  |
| HAX15C0100P2T2B42            | 100 | 11 | 19-35 | 37 | 135 | 100 |
| HAX15C0125P2T2B42            | 125 | 11 | 19-35 | 40 | 160 | 100 |
| HAX15C0150P2T2B42            | 150 | 11 | 19-35 | 40 | 185 | 100 |



| swivel castor with total brake (aluminium pedal) | mm  | mm | mm    | mm | mm  | mm  | Kg  |
|--|-----|----|-------|----|-----|-----|-----|
| BAX15C0080P2T2B42                                | 080 | 11 | 19-35 | 37 | 111 | 132 | 80  |
| BAX15C0100P2T2B42                                | 100 | 11 | 19-35 | 37 | 135 | 132 | 100 |
| BAX15C0125P2T2B42                                | 125 | 11 | 19-35 | 40 | 160 | 132 | 100 |
| BAX15C0150P2T2B42                                | 150 | 11 | 19-35 | 40 | 185 | 132 | 100 |




| swivel castor with total brake (plastic pedal) | mm  | mm | mm    | mm | mm  | mm  | Kg  |
|--|-----|----|-------|----|-----|-----|-----|
| KAX15C0100P2T2B42                              | 100 | 11 | 19-35 | 37 | 135 | 132 | 100 |
| KAX15C0125P2T2B42                              | 125 | 11 | 19-35 | 40 | 160 | 132 | 100 |
| KAX15C0150P2T2B42                              | 150 | 11 | 19-35 | 40 | 185 | 132 | 100 |

| item code | tube type                 | mounting size | screw        | material          |
|-----------|---------------------------|---------------|--------------|-------------------|
| EXSQ2124  | expander for square tubes | 11mm          | screw M10x90 | aluminium / nylon |
| EXSQ2427  | expander for square tubes | 11mm          | screw M10x90 | aluminium / nylon |
| EXSQ2730  | expander for square tubes | 11mm          | screw M10x90 | aluminium / nylon |
| EXSQ3135  | expander for square tubes | 11mm          | screw M10x90 | aluminium / nylon |
| EXSQ3640  | expander for square tubes | 11mm          | screw M10x90 | aluminium / nylon |



**CASCOO. Apparatus Castors. Twin Wheels.  
Series P2T2**



Rim: Polypropylene  
Tread: Thermoplastic Rubber 95° Shore A  
Bearing: Plain bearing / Single ball bearing  
Threadguard: Without / Small plastic threadguard  
Load capacities: 70kg - 100kg  
Diameters: 50mm - 75 mm  
Temperature Range: - 20° C - + 60° C



| swivel castor     |   | mm  | mm    | mm                | mm  | mm | mm  | mm | Kg  |
|-------------------|---|-----|-------|-------------------|-----|----|-----|----|-----|
| SDPE6C0050P2T2PON | ≡ | 050 | 60X60 | 48/38X48/38       | 6.3 | 25 | 72  |    | 70  |
| SDPE6C0050P2T2B42 | ≡ | 050 | 60X60 | 48/38X48/38       | 6.3 | 25 | 72  |    | 70  |
| SDPE1C0075P2T2PON | ≡ | 075 | 77X67 | 61.5/56X51.5/46.5 | 8.5 | 32 | 102 |    | 100 |
| SDPE1C0075P2T2B42 | ≡ | 075 | 77X67 | 61.5/56X51.5/46.5 | 8.5 | 32 | 102 |    | 100 |



| fixed castor      |   | mm  | mm    | mm                | mm  | mm | mm  | mm | mm | Kg  |
|-------------------|---|-----|-------|-------------------|-----|----|-----|----|----|-----|
| TDPE6C0050P2T2PON | ≡ | 050 | 60X60 | 48/38X48/38       | 6.3 | 25 | 72  | 80 |    | 70  |
| TDPE6C0050P2T2B42 | ≡ | 050 | 60X60 | 48/38X48/38       | 6.3 | 25 | 72  | 80 |    | 70  |
| TDPE1C0075P2T2PON | ≡ | 075 | 77X67 | 61.5/56X51.5/46.5 | 8.5 | 32 | 102 | 96 |    | 100 |
| TDPE1C0075P2T2B42 | ≡ | 075 | 77X67 | 61.5/56X51.5/46.5 | 8.5 | 32 | 102 | 96 |    | 100 |



| wheel only |   | mm  | mm | mm | mm | Ø  | Kg |
|------------|---|-----|----|----|----|----|----|
| 050P2T2PON | ≡ | 050 | 19 | 22 | 8  | M6 | 50 |
| 075P2T2PON | ≡ | 075 | 25 | 30 | 8  | M8 | 75 |



| wheel only |   | mm  | mm | mm | mm | Ø  | Kg |
|------------|---|-----|----|----|----|----|----|
| 050P2T2B42 | ≡ | 050 | 19 | 22 | 10 | M6 | 50 |
| 075P2T2B42 | ≡ | 075 | 25 | 30 | 10 | M8 | 75 |

**CASCOO. Apparatus Castors. Twin Wheels.  
Series P2T2**



Rim: Polypropylene  
Tread: Thermoplastic Rubber 95° Shore A  
Bearing: Plain bearing / Single ball bearing  
Threadguard: Without / Small plastic threadguard  
Load capacities: 70kg - 100kg  
Diameters: 50mm - 75 mm  
Temperature Range: - 20° C - + 60° C



| swivel castor     |   | mm  | mm | mm | mm    | Kg  |
|-------------------|---|-----|----|----|-------|-----|
| HDHHHC0050P2T2PON | ≡ | 050 | 11 |    | 25 70 | 70  |
| HDHHHC0050P2T2B42 | ≡ | 050 | 11 |    | 25 70 | 70  |
| HDHJJC0075P2T2PON | ≡ | 075 | 11 |    | 32 99 | 100 |
| HDHJJC0075P2T2B42 | ≡ | 075 | 11 |    | 32 99 | 100 |



| fixed castor      |   | mm  | mm | mm | mm       | mm | Kg  |
|-------------------|---|-----|----|----|----------|----|-----|
| BDHHHC0050P2T2PON | ≡ | 050 | 11 |    | 25 69 80 |    | 70  |
| BDHHHC0050P2T2B42 | ≡ | 050 | 11 |    | 25 69 80 |    | 70  |
| BDHJJC0075P2T2PON | ≡ | 075 | 11 |    | 32 99 96 |    | 100 |
| BDHJJC0075P2T2B42 | ≡ | 075 | 11 |    | 32 99 96 |    | 100 |



| wheel only |   | mm  | mm | mm | mm | Ø  | Kg |
|------------|---|-----|----|----|----|----|----|
| 050P2T2PON | ≡ | 050 | 19 | 22 | 8  | M6 | 50 |
| 075P2T2PON | ≡ | 075 | 25 | 30 | 8  | M8 | 75 |



| wheel only |   | mm  | mm | mm | mm | Ø  | Kg |
|------------|---|-----|----|----|----|----|----|
| 050P2T2B42 | ≡ | 050 | 19 | 22 | 10 | M6 | 50 |
| 075P2T2B42 | ≡ | 075 | 25 | 30 | 10 | M8 | 75 |




CASCOO.Shopping Castors.



CASCOO makes your shopping easy and happy!  
CASCOO shopping castors are the best choice to supermarket and shopping centers owing to its update design and Hi-Tech edge production.

**CASCOO.Shopping Castors.  
Series P2A2**



Rim: Polypropylene  
Tread: Thermoplastic Rubber 85° Shore A  
Bearing: Single ball bearing  
Threadguard: Big plastic threadguard  
Load capacities: 75kg - 100kg  
Diameters: 80 mm - 125 mm  
Temperature Range: - 20° C - + 60° C



| swivel castor     | mm  | mm   | mm | mm  | Kg  |
|-------------------|-----|------|----|-----|-----|
| HEHF5CC075P2A2B42 | 075 | 10.3 | 30 | 100 | 75  |
| HEHG5CC100P2A2B42 | 100 | 11   | 36 | 128 | 100 |
| HEHD5CC125P2A2B42 | 125 | 13   | 38 | 155 | 100 |

**Fittings:**



Item No.HEHE5CC100  
Item No.HEHA5CC125  
Hole fitting/apparatus


Item No.HEHF5CC100  
Item No.HEHB5CC125  
Hole fitting/rievet

Item No.HEHG5CC100  
Item No.HEHD5CC125  
Hole fitting/hexagonal



| wheel only | mm  | mm | mm | mm | Ø  | Kg  |
|------------|-----|----|----|----|----|-----|
| 075P2A2B42 | 075 | 25 | 28 | 10 | M6 | 75  |
| 100P2A2B42 | 100 | 32 | 36 | 15 | M8 | 100 |
| 125P2A2B42 | 125 | 32 | 40 | 15 | M8 | 100 |

**CASCOO.Shopping Castors.  
Series P2A2**



Rim: Polypropylene  
Tread: Thermoplastic Rubber 85° Shore A  
Bearing: Single ball bearing  
Threadguard: Big plastic threadguard  
Load capacities: 75kg - 100kg  
Diameters: 80 mm - 125 mm  
Temperature Range: - 20° C - + 60° C




| swivel castor     | mm  | mm | mm | mm  | Kg  |
|-------------------|-----|----|----|-----|-----|
| HEB25CC125P2A2B42 | 125 | 12 | 40 | 155 | 100 |



| wheel only | mm  | mm | mm | mm | Ø  | Kg  |
|------------|-----|----|----|----|----|-----|
| 075P2A2B42 | 75  | 25 | 28 | 10 | M6 | 75  |
| 100P2A2B42 | 100 | 32 | 36 | 15 | M8 | 100 |
| 125P2A2B42 | 125 | 32 | 40 | 15 | M8 | 100 |

**Series U2U2**



Rim: Polyurethane  
Tread: Polyurethane  
Bearing: Single ball bearing  
Threadguard: Small plastic threadguard  
Load capacities: 80kg  
Diameters: 125 mm  
Temperature Range: - 20° C - + 60° C



| swivel castor     | mm  | mm | mm | mm  | Kg |
|-------------------|-----|----|----|-----|----|
| HEC25CC125U2U2B32 | 125 | 12 | 38 | 155 | 80 |



CASCOO. Industrial Castors.



CASCOO offers a wide range of castors & wheels for industry application. Over 90% of our castors & wheels are made in house which leads to consistent quality and stability delivery.



### CASCOO. Innovation.

The new CASCOO innovation line stands for competition. Simple, Strong, Innovative - the ultimate price-breaker.



|              | 80mm                              | 100mm                             | 125mm                             |
|--------------|-----------------------------------|-----------------------------------|-----------------------------------|
| rivet        | open rivet                        | open rivet                        | open rivet                        |
| hub          | 42mm                              | 42mm                              | 46mm                              |
| axle         | 8mm                               | 8mm                               | 8mm/10mm                          |
| brake        | no                                | no                                | no                                |
| total height | 108mm                             | 128mm                             | 155mm                             |
| load cap.    | up to 150kg                       | up to 150kg                       | up to 200kg                       |
| highlight    | only available in stainless steel | only available in stainless steel | only available in stainless steel |

### CASCOO. Basics.

CASCOO Basics - wheels and castors that make everyday life easier. Our favorable line without qualitative restrictions.



|              | 80mm        | 100mm       | 125mm       |
|--------------|-------------|-------------|-------------|
| rivet        | semi-hollow | semi-hollow | semi-hollow |
| hub          | 42mm        | 42mm        | 52mm        |
| axle         | 8mm         | 8mm         | 8mm/ 10mm   |
| brake        | standard    | standard    | standard    |
| total height | 105mm       | 125mm       | 155mm       |
| load cap.    | up to 150kg | up to 150kg | up to 200kg |

### CASCOO. Flex.

Specific requirements require specific measures. Be more flexible with CASCOO Flex, which can be your solution for a successful business.



|              | 80mm             | 100mm            | 125mm            | 160mm            | 200mm            |
|--------------|------------------|------------------|------------------|------------------|------------------|
| rivet        | solid steel      |
| hub          | 42mm             | 42mm             | 52mm             | 60mm             | 60mm             |
| axle         | 8mm              | 8mm              | 8mm/ 10mm        | 12mm             | 12mm             |
| brake        | standard         | standard         | standard         | adjustable       | adjustable       |
| total height | 100mm            | 125mm            | 155mm            | 190mm            | 235mm            |
| load cap.    | up to 150kg      | up to 150kg      | up to 200kg      | up to 300kg      | up to 300kg      |
| highlight    | directional lock |

### CASCOO. Premium.


With CASCOO Premium your good comes good rolling. Special emphasis on material strength and stability. Let us convince you.



|              | 80mm        | 100mm                                 | 125mm                                 | 160mm       | 200mm       |
|--------------|-------------|---------------------------------------|---------------------------------------|-------------|-------------|
| rivet        | solid steel | solid steel                           | solid steel                           | solid steel | solid steel |
| hub          | 42mm        | 42mm                                  | 52mm                                  | 60mm        | 60mm        |
| axle         | 8mm         | 8mm                                   | 8mm/ 10mm                             | 12mm        | 12mm        |
| brake        | standard    | standard                              | standard                              | standard    | standard    |
| total height | 105mm       | 128mm                                 | 155mm                                 | 195mm       | 235mm       |
| load cap.    | up to 180kg | up to 250kg                           | up to 300kg                           | up to 350kg | up to 400kg |
| highlight    |             | also available with plate 135 x 110mm | also available with plate 135 x 110mm |             |             |

## CASCOO. Industrial Castors. CASCOO Basics. Series P0P0

Also available with CASCOO Premium or CASCOO Flex



Rim: Polypropylene  
Tread: Polypropylene  
Bearing: Roller Bearing  
Threadguard: Small Metal Threadguard  
Load capacities: 80kg - 250kg  
Diameters: 80 mm - 200 mm  
Temperature Range: - 20° C - + 60° C



| swivel castor   |     |         |           |    |    |     |    |     |
|---|-----|---------|-----------|----|----|-----|----|-----|
|   | mm  | mm      | mm        | mm | mm | mm  | mm | Kg  |
| SBP25WC080POP0R1W   | 080 | 105X80  | 80/77x60  | 9  | 40 | 105 |    | 80  |
| SBP25WC100POP0P0N<br>SBP25WC100POP0R1W                      | 100 | 105X80  | 80/77x60  | 9  | 40 | 125 |    | 100 |
| SBP35WC125POP0R1W<br>SBP35WC125X0P0R1W<br>SBP35WC125POP0B30 | 125 | 105X80  | 80/77x60  | 9  | 40 | 155 |    | 150 |
| SPP58WC160POP0R1W   | 160 | 135X110 | 105x84/76 | 11 | 55 | 195 |    | 250 |
| SPP58WC200POP0R1W   | 200 | 135X110 | 105x84/76 | 11 | 55 | 235 |    | 250 |



| fixed castor  |     |         |           |    |     |     |
|---|-----|---------|-----------|----|-----|-----|
|   | mm  | mm      | mm        | mm | mm  | Kg  |
| FBP22WC080POP0R1W   | 080 | 105X80  | 80/77x60  | 9  | 105 | 80  |
| FBP22WC100POP0P0N<br>FBP22WC100POP0R1W                      | 100 | 105X80  | 80/77x60  | 9  | 125 | 100 |
| FBP32WC125POP0R1W<br>FBP32WC125X0P0R1W<br>FBP32WC125POP0B30 | 125 | 105X80  | 80/77x60  | 9  | 155 | 150 |
| FPP53WC160POP0R1W   | 160 | 135X110 | 105x84/76 | 11 | 195 | 250 |
| FPP53WC200POP0R1W   | 200 | 135X110 | 105x84/76 | 11 | 235 | 250 |



| swivel castor with total brake                              |     |         |           |    |    |     |     |     |
|---|-----|---------|-----------|----|----|-----|-----|-----|
|   | mm  | mm      | mm        | mm | mm | mm  | mm  | Kg  |
| TBP25WC080POP0R1W   | 080 | 105X80  | 80/77x60  | 9  | 40 | 105 | 127 | 80  |
| TBP25WC100POP0P0N<br>TBP25WC100POP0R1W                      | 100 | 105X80  | 80/77x60  | 9  | 40 | 125 | 127 | 100 |
| TBP35WC125POP0R1W<br>TBP35WC125X0P0R1W<br>TBP35WC125POP0B30 | 125 | 105X80  | 80/77x60  | 9  | 45 | 155 | 127 | 150 |
| TPP58WC160POP0R1W   | 160 | 135X110 | 105x84/76 | 11 | 55 | 195 | 165 | 250 |
| TPP58WC200POP0R1W   | 200 | 135X110 | 105x84/76 | 11 | 55 | 235 | 165 | 250 |

## CASCOO. Industrial Castors. CASCOO Basics. Series P0P0

Also available with CASCOO Premium or CASCOO Flex



Rim: Polypropylene  
Tread: Polypropylene  
Bearing: Roller Bearing  
Threadguard: Small Metal Threadguard  
Load capacities: 80kg - 250kg  
Diameters: 80 mm - 200 mm  
Temperature Range: - 20° C - + 60° C



| swivel castor with bolt hole                                |     |    |    |     |     |
|---|-----|----|----|-----|-----|
|   | mm  | mm | mm | mm  | Kg  |
| HBH35WC080POP0R1W   | 080 | 13 | 40 | 104 | 80  |
| HBH35WC100POP0P0N<br>HBH35WC100POP0R1W                      | 100 | 13 | 40 | 124 | 100 |
| HBH85WC125POP0R1W<br>HBH85WC125X0P0R1W<br>HBH85WC125POP0B30 | 125 | 13 | 40 | 154 | 150 |
| HPH98WC160POP0R1W   | 160 | 13 | 55 | 189 | 200 |
| HPH98WC200POP0R1W   | 200 | 13 | 55 | 228 | 200 |



| swivel castor with bolt hole total brake                    |     |    |    |     |     |     |
|---|-----|----|----|-----|-----|-----|
|   | mm  | mm | mm | mm  | mm  | Kg  |
| BBH35WC080POP0R1W   | 080 | 13 | 40 | 104 | 127 | 80  |
| BBH35WC100POP0P0N<br>BBH35WC100POP0R1W                      | 100 | 13 | 40 | 124 | 127 | 100 |
| BBH85WC125POP0R1W<br>BBH85WC125X0P0R1W<br>BBH85WC125POP0B30 | 125 | 13 | 45 | 154 | 127 | 150 |
| BPH98WC160POP0R1W   | 160 | 13 | 55 | 189 | 165 | 200 |
| BPH98WC200POP0R1W   | 200 | 13 | 55 | 228 | 165 | 200 |



| wheel only                             |     |    |    |    |     |     |
|--|-----|----|----|----|-----|-----|
|  | mm  | mm | mm | mm | Ø   | Kg  |
| 080POP0R1W                             | 080 | 34 | 40 | 12 | M8  | 80  |
| 100POP0P0N<br>100POP0R1W               | 100 | 36 | 40 | 12 | M8  | 100 |
| 125X0P0R1W<br>125POP0R1W<br>125POP0B30 | 125 | 38 | 50 | 12 | M8  | 150 |
|  | 125 | 38 | 50 | 15 | M10 | 150 |
|  | 125 | 38 | 50 | 15 | M10 | 150 |
| 160POP0R1W                             | 160 | 50 | 59 | 20 | M12 | 250 |
| 200POP0R1W                             | 200 | 50 | 59 | 20 | M12 | 250 |

## CASCOO. Industrial Castors. CASCOO Basics. Series P0P0 - Special 108mm



Also available with CASCOO Innovation



Rim: Polypropylene(P) / Polypropylene With Wteel Tube(Q)  
Tread: Polypropylene(P) / Polypropylene With Steel Tube(Q)  
Bearing: Roller Bearing  
Threadguard: Small Metal Threadguard  
Load capacities: 120kg - 150kg  
Diameters: 108 mm  
Temperature Range: - 20° C - + 60° C



| swivel castor     |     |        |          |    |    |     |    |     |
|-------------------|-----|--------|----------|----|----|-----|----|-----|
|                   | mm  | mm     | mm       | mm | mm | mm  | mm | Kg  |
| SBP25WC108P0P0R1W | 108 | 105X80 | 80/77x60 | 9  | 40 | 132 |    | 150 |
| SPP21WC108Q0P0R1W | 108 | 105X80 | 80/77x60 | 9  | 40 | 132 |    | 150 |



| fixed castor      |     |        |          |    |     |     |
|-------------------|-----|--------|----------|----|-----|-----|
|                   | mm  | mm     | mm       | mm | mm  | Kg  |
| FBP22WC108P0P0R1W | 108 | 105X80 | 80/77x60 | 9  | 132 | 150 |



| fixed castor strengthened |     |        |          |    |     |     |
|---------------------------|-----|--------|----------|----|-----|-----|
|                           | mm  | mm     | mm       | mm | mm  | Kg  |
| FPP65WC108Q0P0R1W         | 108 | 105X80 | 80/77x60 | 9  | 132 | 150 |



| swivel castor with total brake |     |        |          |    |    |     |     |     |
|--------------------------------|-----|--------|----------|----|----|-----|-----|-----|
|                                | mm  | mm     | mm       | mm | mm | mm  | mm  | Kg  |
| TBP25WC108P0P0R1W              | 108 | 105X80 | 80/77x60 | 9  | 40 | 132 | 127 | 150 |
| TPP21WC108Q0P0R1W              | 108 | 105X80 | 80/77x60 | 9  | 40 | 132 | 127 | 150 |

## CASCOO. Industrial Castors. CASCOO Basics. Series P0P0 - Special 108mm



Also available with CASCOO Innovation



Rim: Polypropylene(P) / Polypropylene With Wteel Tube(Q)  
Tread: Polypropylene(P) / Polypropylene With Steel Tube(Q)  
Bearing: Roller Bearing  
Threadguard: Small Metal Threadguard  
Load capacities: 120kg - 150kg  
Diameters: 108 mm  
Temperature Range: - 20° C - + 60° C



| swivel castor with bolt hole |     |    |    |     |    |     |
|------------------------------|-----|----|----|-----|----|-----|
|                              | mm  | mm | mm | mm  | mm | Kg  |
| HBH35WC108P0P0R1W            | 108 | 13 | 40 | 131 |    | 100 |



| swivel castor with bolt hole total brake |     |    |    |     |     |    |     |
|--|-----|----|----|-----|-----|----|-----|
|  | mm  | mm | mm | mm  | mm  | mm | Kg  |
| BBH35WC108P0P0R1W                        | 108 | 13 | 40 | 131 | 127 |    | 100 |




| Wheel only |     |    |    |    |    |     |
|------------|-----|----|----|----|----|-----|
|            | mm  | mm | mm | mm | Ø  | Kg  |
| 108P0P0R1W | 108 | 36 | 40 | 12 | M8 | 150 |
| 108Q0P0R1W | 108 | 36 | 40 | 12 | M8 | 150 |

## CASCOO. Industrial Castors. CASCOO Premium. Series NONO

Also available with CASCOO Basics or CASCOO Flex



Rim: Polyamide(N) / Polyamide With Steel Tube(H)  
 Tread: Polyamide(N) / Polyamide With Wteel Tube(H)  
 Bearing: Roller Bearing  
 Threadguard: Small Metal Threadguard  
 Load capacities: 130kg - 300kg  
 Diameters: 80 mm - 200 mm  
 Temperature Range: -40° C - +80° C



| swivel castor   |     |         |           |    |    |     |    |     |
|---|-----|---------|-----------|----|----|-----|----|-----|
|   | mm  | mm      | mm        | mm | mm | mm  | mm | Kg  |
| SPP21WC080NONOR1W   | 080 | 105X80  | 80/77x60  | 9  | 40 | 105 |    | 130 |
| SPP21WC100NONOPON<br>SPP21WC100NONOR1W                      | 100 | 105X80  | 80/77x60  | 9  | 40 | 128 |    | 150 |
| SPP31WC125NONOR1W<br>SPP31WC125HONOR1W<br>SPP31WC125NONOB30 | 125 | 105X80  | 80/77x60  | 9  | 40 | 155 |    | 200 |
| SPP58WC160NONOR1W   | 160 | 135X110 | 105x84/76 | 11 | 55 | 195 |    | 300 |
| SPP58WC200NONOR1W   | 200 | 135X110 | 105x84/76 | 11 | 55 | 235 |    | 300 |



| fixed castor  |     |         |           |    |     |     |
|---|-----|---------|-----------|----|-----|-----|
|   | mm  | mm      | mm        | mm | mm  | Kg  |
| FPP22WC080NONOR1W   | 080 | 105X80  | 80/77x60  | 9  | 105 | 130 |
| FPP22WC100NONOPON<br>FPP22WC100NONOR1W                      | 100 | 105X80  | 80/77x60  | 9  | 128 | 150 |
| FPP35WC125NONOR1W<br>FPP35WC125HONOR1W<br>FPP35WC125NONOB30 | 125 | 105X80  | 80/77x60  | 9  | 155 | 200 |
| FPP53WC160NONOR1W   | 160 | 135X110 | 105x84/76 | 11 | 195 | 300 |
| FPP53WC200NONOR1W   | 200 | 135X110 | 105x84/76 | 11 | 235 | 300 |



| swivel castor with total brake                              |     |         |           |    |    |     |     |     |
|---|-----|---------|-----------|----|----|-----|-----|-----|
|   | mm  | mm      | mm        | mm | mm | mm  | mm  | Kg  |
| TPP21WC080NONOR1W   | 080 | 105X80  | 80/77x60  | 9  | 40 | 105 | 127 | 130 |
| TPP21WC100NONOPON<br>TPP21WC100NONOR1W                      | 100 | 105X80  | 80/77x60  | 9  | 40 | 128 | 127 | 150 |
| TPP31WC125NONOR1W<br>TPP31WC125HONOR1W<br>TPP31WC125NONOB30 | 125 | 105X80  | 80/77x60  | 9  | 45 | 155 | 127 | 200 |
| TPP58WC160NONOR1W   | 160 | 135X110 | 105x84/76 | 11 | 55 | 195 | 165 | 300 |
| TPP58WC200NONOR1W   | 200 | 135X110 | 105x84/76 | 11 | 55 | 235 | 165 | 300 |

## CASCOO. Industrial Castors. CASCOO Premium. Series NONO

Also available with CASCOO Basics or CASCOO Flex



Rim: Polyamide(N) / Polyamide With Steel Tube(H)  
 Tread: Polyamide(N) / Polyamide With Wteel Tube(H)  
 Bearing: Roller Bearing  
 Threadguard: Small Metal Threadguard  
 Load capacities: 130kg - 300kg  
 Diameters: 80 mm - 200 mm  
 Temperature Range: -40° C - +80° C



| swivel castor with bolt hole                                |     |    |    |     |     |
|---|-----|----|----|-----|-----|
|   | mm  | mm | mm | mm  | Kg  |
| HPH35WC080NONOR1W   | 080 | 13 | 40 | 104 | 130 |
| HPH35WC100NONOPON<br>HPH35WC100NONOR1W                      | 100 | 13 | 40 | 127 | 150 |
| HPH85WC125NONOR1W<br>HPH85WC125HONOR1W<br>HPH85WC125NONOB30 | 125 | 13 | 40 | 154 | 150 |
| HPH98WC160NONOR1W   | 160 | 13 | 55 | 189 | 200 |
| HPH98WC200NONOR1W   | 200 | 13 | 55 | 228 | 200 |



| swivel castor with bolt hole total brake                    |     |    |    |     |     |     |
|---|-----|----|----|-----|-----|-----|
|   | mm  | mm | mm | mm  | mm  | Kg  |
| BPH35WC080NONOR1W   | 080 | 13 | 40 | 104 | 127 | 130 |
| BPH35WC100NONOPON<br>BPH35WC100NONOR1W                      | 100 | 13 | 40 | 127 | 127 | 150 |
| BPH85WC125NONOR1W<br>BPH85WC125HONOR1W<br>BPH85WC125NONOB30 | 125 | 13 | 45 | 154 | 127 | 150 |
| BPH98WC160NONOR1W   | 160 | 13 | 55 | 189 | 165 | 200 |
| BPH98WC200NONOR1W   | 200 | 13 | 55 | 228 | 165 | 200 |




| wheel only                             |     |    |    |    |     |     |
|--|-----|----|----|----|-----|-----|
|  | mm  | mm | mm | mm | Ø   | Kg  |
| 080NONOR1W                             | 080 | 34 | 40 | 12 | M8  | 130 |
| 100NONOPON<br>100NONOR1W               | 100 | 36 | 40 | 12 | M8  | 150 |
| 125NONOR1W<br>125HONOR1W<br>125NONOB30 | 125 | 38 | 50 | 15 | M10 | 200 |
| 160NONOR1W                             | 160 | 50 | 59 | 20 | M12 | 300 |
| 200NONOR1W                             | 200 | 50 | 59 | 20 | M12 | 300 |

CASCOO. Industrial Castors. CASCOO Premium.  
Series NONO - Special 108mm



Rim: Polyamide(N) / Polyamide With Steel Tube(H)  
Tread: Polyamide(N) / Polyamide With Steel Tube(H)  
Bearing: Roller Bearing  
Threadguard: Small Metal Threadguard  
Load capacities: 150kg - 200kg  
Diameters: 108 mm  
Temperature Range: - 40° C - + 80° C



| swivel castor                          |     |        |          |    |    |     |    |    |     |
|--|-----|--------|----------|----|----|-----|----|----|-----|
|  | mm  | mm     | mm       | mm | mm | mm  | mm | mm | Kg  |
| SPP21WC108H0N0R1W<br>SPP21WC108N0N0B30 | 108 | 105X80 | 80/77x60 | 9  | 40 | 132 |    |    | 200 |



| fixed castor                           |     |        |          |    |    |     |     |
|--|-----|--------|----------|----|----|-----|-----|
|  | mm  | mm     | mm       | mm | mm | mm  | Kg  |
| FPP22WC108H0N0R1W<br>FPP22WC108N0N0B30 | 108 | 105X80 | 80/77x60 | 9  |    | 132 | 200 |



| fixed castor strengthened  |     |        |          |    |    |     |     |
|--|-----|--------|----------|----|----|-----|-----|
|  | mm  | mm     | mm       | mm | mm | mm  | Kg  |
| FPP65WC108H0N0R1W<br>FPP65WC108N0N0B30<br>FPP63WC108H0N0R1W<br>FPP63WC108N0N0B30 | 108 | 105X80 | 80/77x60 | 9  |    | 132 | 200 |



| fixed castor      |     |        |       |    |    |     |    |     |
|-------------------|-----|--------|-------|----|----|-----|----|-----|
|                   | mm  | mm     | mm    | mm | mm | mm  | mm | Kg  |
| FPP74WC108H0N0R1W | 108 | 100X90 | 78x60 | 9  | 36 | 132 |    | 200 |



| swivel castor with total brake         |     |        |          |    |    |     |     |     |
|--|-----|--------|----------|----|----|-----|-----|-----|
|  | mm  | mm     | mm       | mm | mm | mm  | mm  | Kg  |
| TPP21WC108H0N0R1W<br>TPP21WC108N0N0B30 | 108 | 105X80 | 80/77x60 | 9  | 40 | 132 | 127 | 200 |

CASCOO. Industrial Castors. CASCOO Premium.  
Series NONO - Special 108mm



Rim: Polyamide(N) / Polyamide With Steel Tube(H)  
Tread: Polyamide(N) / Polyamide With Steel Tube(H)  
Bearing: Roller Bearing  
Threadguard: Small Metal Threadguard  
Load capacities: 150kg - 200kg  
Diameters: 108 mm  
Temperature Range: - 40° C - + 80° C



| swivel castor with bolt hole           |     |    |    |    |     |     |
|--|-----|----|----|----|-----|-----|
|  | mm  | mm | mm | mm | mm  | Kg  |
| HPH35WC108N0N0R1W<br>HPH35WC108N0N0B30 | 108 | 13 |    | 40 | 131 | 150 |




| swivel castor with bolt hole total brake |     |    |    |    |     |     |    |     |
|--|-----|----|----|----|-----|-----|----|-----|
|  | mm  | mm | mm | mm | mm  | mm  | mm | Kg  |
| BPH35WC108N0N0R1W<br>BPH35WC108N0N0B30   | 108 | 13 |    | 40 | 131 | 127 |    | 150 |



| wheel only               |     |    |    |    |    |     |
|--------------------------|-----|----|----|----|----|-----|
|                          | mm  | mm | mm | mm | Ø  | Kg  |
| 108H0N0R1W<br>108N0N0B30 | 108 | 36 | 40 | 12 | M8 | 200 |



**CASCOO. Industrial Castors. CASCOO Premium.  
Series P0P0**



Rim: Polypropylene with steel tube(Q)  
 Tread: Polypropylene with steel tube(Q)  
 Bearing: Roller bearing  
 Threadguard: Small metal threadguard  
 Load capacities: 200kg  
 Diameters: 125 mm  
 Temperature Range: - 20° C - + 60° C



| swivel castor     |     |         |           |    |    |     |    |     |
|-------------------|-----|---------|-----------|----|----|-----|----|-----|
|                   | mm  | mm      | mm        | mm | mm | mm  | mm | Kg  |
| SPP47WC125Q0P0R1W | 125 | 135X110 | 105x84/76 | 11 | 50 | 155 |    | 200 |



| fixed castor      |     |         |           |    |     |    |     |
|-------------------|-----|---------|-----------|----|-----|----|-----|
|                   | mm  | mm      | mm        | mm | mm  | mm | Kg  |
| FPP43WC125Q0P0R1W | 125 | 135X110 | 105x84/76 | 11 | 155 |    | 200 |



| swivel castor with total brake |     |         |           |    |    |     |     |     |
|--------------------------------|-----|---------|-----------|----|----|-----|-----|-----|
|                                | mm  | mm      | mm        | mm | mm | mm  | mm  | Kg  |
| TPP47WC125Q0P0R1W              | 125 | 135X110 | 105x84/76 | 11 | 55 | 155 | 154 | 200 |

**CASCOO. Industrial Castors. CASCOO Premium.  
Series N0N0**



Rim: Polyamide With Steel Tube(H)  
 Tread: Polyamide With Steel Tube(H)  
 Bearing: Roller Bearing  
 Threadguard: Small Metal Threadguard  
 Load capacities: 250kg  
 Diameters: 125 mm  
 Temperature Range: - 40° C - + 80° C



| swivel castor     |     |         |           |    |    |     |    |     |
|-------------------|-----|---------|-----------|----|----|-----|----|-----|
|                   | mm  | mm      | mm        | mm | mm | mm  | mm | Kg  |
| SPP47WC125H0N0R1W | 125 | 135X110 | 105x84/76 | 11 | 50 | 155 |    | 250 |



| fixed castor      |     |         |           |    |     |    |     |
|-------------------|-----|---------|-----------|----|-----|----|-----|
|                   | mm  | mm      | mm        | mm | mm  | mm | Kg  |
| FPP43WC125H0N0R1W | 125 | 135X110 | 105x84/76 | 11 | 155 |    | 250 |




| swivel castor with total brake |     |         |           |    |    |     |     |     |
|--------------------------------|-----|---------|-----------|----|----|-----|-----|-----|
|                                | mm  | mm      | mm        | mm | mm | mm  | mm  | Kg  |
| TPP47WC125H0N0R1W              | 125 | 135X110 | 105x84/76 | 11 | 55 | 155 | 154 | 250 |

## CASCOO. Industrial Castors. CASCOO Premium. Series T6P2



Also available with CASCOO Basics or CASCOO Flex

Rim: Polypropylene with TPR Ring  
 Tread: Polypropylene  
 Bearing: Roller Bearing  
 Threadguard: Small Metal Threadguard  
 Load capacities: 160kg - 200kg  
 Diameters: 100 mm - 125 mm  
 Temperature Range: -20° C - +60° C



| swivel castor     |     |        |          |    |    |     |    |     |
|-------------------|-----|--------|----------|----|----|-----|----|-----|
|                   | mm  | mm     | mm       | mm | mm | mm  | mm | Kg  |
| SPP21WC100T6P2R1W | 100 | 105X80 | 80/77x60 | 9  | 40 | 128 |    | 160 |
| SPP31WC125T6P2R1W | 125 | 105X80 | 80/77x60 | 9  | 40 | 155 |    | 200 |




| fixed castor      |     |        |          |    |     |     |
|-------------------|-----|--------|----------|----|-----|-----|
|                   | mm  | mm     | mm       | mm | mm  | Kg  |
| FPP25WC100T6P2R1W | 100 | 105X80 | 80/77x60 | 9  | 128 | 160 |
| FPP35WC125T6P2R1W | 125 | 105X80 | 80/77x60 | 9  | 155 | 200 |



| swivel castor with total brake |     |        |          |    |    |     |     |     |
|--------------------------------|-----|--------|----------|----|----|-----|-----|-----|
|                                | mm  | mm     | mm       | mm | mm | mm  | mm  | Kg  |
| TPP21WC100T6P2R1W              | 100 | 105X80 | 80/77x60 | 9  | 40 | 128 | 127 | 160 |
| TPP31WC125T6P2R1W              | 125 | 105X80 | 80/77x60 | 9  | 45 | 155 | 127 | 200 |



| wheel only |     |    |    |    |     |     |
|------------|-----|----|----|----|-----|-----|
|            | mm  | mm | mm | mm | Ø   | Kg  |
| 100T6P2R1W | 100 | 36 | 40 | 12 | M8  | 160 |
| 125T6P2R1W | 125 | 36 | 50 | 15 | M10 | 200 |

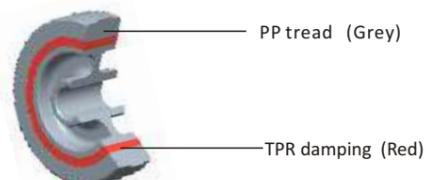

## CASCOO. Industrial Castors. CASCOO Premium. Series T2P2



Also available with CASCOO Basics or CASCOO Flex

Rim: Polypropylene with TPR Ring  
 Tread: Polypropylene  
 Bearing: Single ball bearing  
 Threadguard: Small plastic threadguard  
 Load capacities: 160kg - 200kg  
 Diameters: 100 mm - 125 mm  
 Temperature Range: -20° C - +60° C



| swivel castor     |     |        |          |    |    |     |    |     |
|-------------------|-----|--------|----------|----|----|-----|----|-----|
|                   | mm  | mm     | mm       | mm | mm | mm  | mm | Kg  |
| SPP21WC100T2P2B36 | 100 | 105X80 | 80/77x60 | 9  | 40 | 128 |    | 160 |
| SPP31WC125T2P2B36 | 125 | 105X80 | 80/77x60 | 9  | 40 | 155 |    | 200 |




| fixed castor      |     |        |          |    |     |     |
|-------------------|-----|--------|----------|----|-----|-----|
|                   | mm  | mm     | mm       | mm | mm  | Kg  |
| FPP25WC100T2P2B36 | 100 | 105X80 | 80/77x60 | 9  | 128 | 160 |
| FPP35WC125T2P2B36 | 125 | 105X80 | 80/77x60 | 9  | 155 | 200 |



| swivel castor with total brake |     |        |          |    |    |     |     |     |
|--------------------------------|-----|--------|----------|----|----|-----|-----|-----|
|                                | mm  | mm     | mm       | mm | mm | mm  | mm  | Kg  |
| TPP21WC100T2P2B36              | 100 | 105X80 | 80/77x60 | 9  | 40 | 128 | 127 | 160 |
| TPP31WC125T2P2B36              | 125 | 105X80 | 80/77x60 | 9  | 45 | 155 | 127 | 200 |



| wheel only |     |    |    |    |     |     |
|------------|-----|----|----|----|-----|-----|
|            | mm  | mm | mm | mm | Ø   | Kg  |
| 100T2P2B36 | 100 | 36 | 46 | 15 | M10 | 160 |
| 125T2P2B36 | 125 | 36 | 46 | 15 | M10 | 200 |

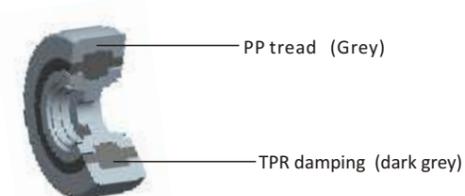

## CASCOO. Industrial Castors. CASCOO Premium. Series M6N2



Also available with CASCOO Basics or CASCOO Flex

Rim: Polyamide with Elastic Ring  
 Tread: Polyamide  
 Bearing: Roller Bearing  
 Threadguard: Small Plastic Threadguard  
 Load capacities: 160kg - 200kg  
 Diameters: 100 mm - 125 mm  
 Temperature Range: - 20° C - + 80° C



| swivel castor     |     |        |          |    |    |     |    |     |
|-------------------|-----|--------|----------|----|----|-----|----|-----|
|                   | mm  | mm     | mm       | mm | mm | mm  | mm | Kg  |
| SPP21WC100M6N2R32 | 100 | 105X80 | 80/77x60 | 9  | 40 | 128 |    | 160 |
| SPP31WC125M6N2R32 | 125 | 105X80 | 80/77x60 | 9  | 40 | 155 |    | 200 |




| fixed castor      |     |        |          |    |     |     |
|-------------------|-----|--------|----------|----|-----|-----|
|                   | mm  | mm     | mm       | mm | mm  | Kg  |
| FPP25WC100M6N2R32 | 100 | 105X80 | 80/77x60 | 9  | 128 | 160 |
| FPP35WC125M6N2R32 | 125 | 105X80 | 80/77x60 | 9  | 155 | 200 |



| swivel castor with total brake |     |        |          |    |    |     |     |     |
|--------------------------------|-----|--------|----------|----|----|-----|-----|-----|
|                                | mm  | mm     | mm       | mm | mm | mm  | mm  | Kg  |
| TPP21WC100M6N2R32              | 100 | 105X80 | 80/77x60 | 9  | 40 | 128 | 127 | 160 |
| TPP31WC125M6N2R32              | 125 | 105X80 | 80/77x60 | 9  | 45 | 155 | 127 | 200 |



| wheel only |     |    |    |    |     |     |
|------------|-----|----|----|----|-----|-----|
|            | mm  | mm | mm | mm | ∅   | Kg  |
| 100M6N2R32 | 100 | 36 | 40 | 12 | M8  | 160 |
| 125M6N2R32 | 125 | 36 | 50 | 15 | M10 | 200 |

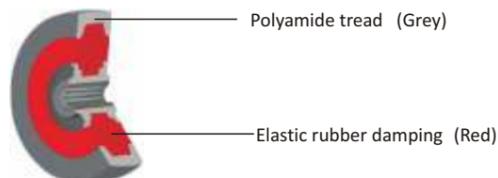

## CASCOO. Industrial Castors. CASCOO Premium. Series M1N2



Also available with CASCOO Basics or CASCOO Flex

Rim: Polyamide with Elastic Ring  
 Tread: Polyamide  
 Bearing: Single Ball Bearing  
 Threadguard: Small Plastic Threadguard  
 Load capacities: 160kg - 200kg  
 Diameters: 100 mm - 125 mm  
 Temperature Range: - 20° C - + 80° C



| swivel castor     |     |        |          |    |    |     |    |     |
|-------------------|-----|--------|----------|----|----|-----|----|-----|
|                   | mm  | mm     | mm       | mm | mm | mm  | mm | Kg  |
| SPP21WC100M1N2B32 | 100 | 105X80 | 80/77x60 | 9  | 40 | 128 |    | 160 |
| SPP31WC125M1N2B32 | 125 | 105X80 | 80/77x60 | 9  | 40 | 155 |    | 200 |




| fixed castor      |     |        |          |    |     |     |
|-------------------|-----|--------|----------|----|-----|-----|
|                   | mm  | mm     | mm       | mm | mm  | Kg  |
| FPP25WC100M1N2B32 | 100 | 105X80 | 80/77x60 | 9  | 128 | 160 |
| FPP35WC125M1N2B32 | 125 | 105X80 | 80/77x60 | 9  | 155 | 200 |



| swivel castor with total brake |     |        |          |    |    |     |     |     |
|--------------------------------|-----|--------|----------|----|----|-----|-----|-----|
|                                | mm  | mm     | mm       | mm | mm | mm  | mm  | Kg  |
| TPP21WC100M1N2B32              | 100 | 105X80 | 80/77x60 | 9  | 40 | 128 | 127 | 160 |
| TPP31WC125M1N2B32              | 125 | 105X80 | 80/77x60 | 9  | 45 | 155 | 127 | 200 |



| wheel only |     |    |    |    |     |     |
|------------|-----|----|----|----|-----|-----|
|            | mm  | mm | mm | mm | ∅   | Kg  |
| 100M1N2B32 | 100 | 36 | 40 | 12 | M8  | 160 |
| 125M1N2B32 | 125 | 36 | 50 | 15 | M10 | 200 |

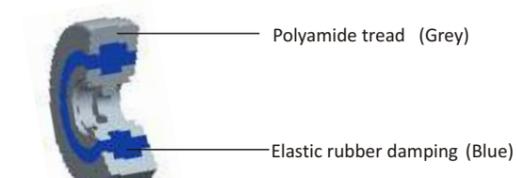


## CASCOO. Industrial Castors. CASCOO Premium. Series N2U6



Also available with CASCOO Basics Premium or Flex

Rim: Polyamide  
 Tread: Thermoplastic Polyurethane 95° Shore A  
 Bearing: Roller Bearing / Single Ball Bearing  
 Threadguard: Small Metal Threadguard / Small Plastic Threadguard  
 Load capacities: 130kg - 200kg  
 Diameters: 80 mm - 125 mm  
 Temperature Range: -40° C - +80° C



| swivel castor                          |    |        |          |    |    |     |     |    |     |
|--|----|--------|----------|----|----|-----|-----|----|-----|
|  | mm | mm     | mm       | mm | mm | mm  | mm  | mm | Kg  |
| SBP25WC080N2U6R1W<br>SPP21WC080N2U6B32 |    | 105x80 | 80/77x60 | 9  | 40 | 105 |     |    | 130 |
| SBP25WC100N2U6R1W<br>SPP21WC100N2U6B32 |    | 105x80 | 80/77x60 | 9  | 40 | 125 | 128 |    | 150 |
| SBP35WC125N2U6R1W<br>SPP31WC125N2U6B32 |    | 105x80 | 80/77x60 | 9  | 40 | 155 |     |    | 200 |



| fixed castor                           |    |        |          |    |     |     |     |
|--|----|--------|----------|----|-----|-----|-----|
|  | mm | mm     | mm       | mm | mm  | mm  | Kg  |
| FBP22WC080N2U6R1W<br>FPP22WC080N2U6B32 |    | 105x80 | 80/77x60 | 9  | 105 |     | 130 |
| FBP22WC100N2U6R1W<br>FPP25WC100N2U6B32 |    | 105x80 | 80/77x60 | 9  | 125 | 128 | 150 |
| FBP32WC125N2U6R1W<br>FPP35WC125N2U6B32 |    | 105x80 | 80/77x60 | 9  | 155 |     | 200 |



| swivel castor with total brake         |    |        |          |    |    |     |     |     |
|--|----|--------|----------|----|----|-----|-----|-----|
|  | mm | mm     | mm       | mm | mm | mm  | mm  | Kg  |
| TBP25WC080N2U6R1W<br>TPP21WC080N2U6B32 |    | 105x80 | 80/77x60 | 9  | 40 | 105 | 127 | 130 |
| TBP25WC100N2U6R1W<br>TPP21WC100N2U6B32 |    | 105x80 | 80/77x60 | 9  | 40 | 125 | 127 | 150 |
| TBP35WC125N2U6R1W<br>TPP31WC125N2U6B32 |    | 105x80 | 80/77x60 | 9  | 45 | 155 | 127 | 200 |



| wheel only               |    |    |    |    |     |     |
|--------------------------|----|----|----|----|-----|-----|
|                          | mm | mm | mm | mm | Ø   | Kg  |
| 080N2U6R1W<br>080N2U6B32 |    | 32 | 40 | 12 | M8  | 130 |
| 100N2U6R1W<br>100N2U6B32 |    | 32 | 40 | 12 | M8  | 150 |
| 125N2U6R1W<br>125N2U6B32 |    | 32 | 50 | 15 | M10 | 200 |

## CASCOO. Industrial Castors. CASCOO Premium. Series N2U6



Also available with CASCOO Flex

Rim: Polyamide  
 Tread: Thermoplastic Polyurethane 95° Shore A  
 Bearing: Roller Bearing / Double Ball Bearing  
 Threadguard: Small Metal Threadguard / Small Plastic Threadguard  
 Load capacities: 300kg - 350kg  
 Diameters: 160 mm - 200 mm  
 Temperature Range: -40° C - +80° C



| swivel castor                          |    |         |           |    |    |     |     |
|--|----|---------|-----------|----|----|-----|-----|
|  | mm | mm      | mm        | mm | mm | mm  | Kg  |
| SPP57WC160N2U6R1W<br>SPP57WC160N2U6B32 |    | 135x110 | 105x84/76 | 11 | 55 | 195 | 300 |
| SPP57WC200N2U6R1W<br>SPP57WC200N2U6D32 |    | 135x110 | 105x84/76 | 11 | 55 | 235 | 350 |



| fixed castor                           |    |         |           |    |     |    |     |
|--|----|---------|-----------|----|-----|----|-----|
|  | mm | mm      | mm        | mm | mm  | mm | Kg  |
| FPP53WC160N2U6R1W<br>FPP53WC160N2U6B32 |    | 135x110 | 105x84/76 | 11 | 195 |    | 300 |
| FPP53WC200N2U6R1W<br>FPP53WC200N2U6D32 |    | 135x110 | 105x84/76 | 11 | 235 |    | 350 |




| swivel castor with total brake         |    |         |           |    |    |     |     |     |
|--|----|---------|-----------|----|----|-----|-----|-----|
|  | mm | mm      | mm        | mm | mm | mm  | mm  | Kg  |
| TPP57WC160N2U6R1W<br>TPP57WC160N2U6B32 |    | 135x110 | 105x84/76 | 11 | 55 | 195 | 165 | 300 |
| TPP57WC200N2U6R1W<br>TPP57WC200N2U6D32 |    | 135x110 | 105x84/76 | 11 | 55 | 235 | 165 | 350 |



| wheel only               |    |    |    |    |     |     |
|--------------------------|----|----|----|----|-----|-----|
|                          | mm | mm | mm | mm | Ø   | Kg  |
| 160N2U6R1W<br>160N2U6B32 |    | 50 | 59 | 20 | M12 | 300 |
| 200N2U6R1W<br>200N2U6D32 |    | 50 | 59 | 20 | M12 | 350 |

CASCOO. Industrial Castors. CASCOO Basics.  
Series R4F1



Rim: Polyamide  
Tread: High Quality Blue Elastic 75° Shore A  
Bearing: Roller Bearing / Single Ball Bearing / Double Ball Bearing  
Threadguard: Without / Small Plastic Threadguard / Without  
Load capacities: 130kg - 350kg  
Diameters: 80 mm - 200 mm  
Temperature Range: -20° C - +80° C



| swivel castor                          |     |         |           |    |    |     |     |
|--|-----|---------|-----------|----|----|-----|-----|
|  | mm  | mm      | mm        | mm | mm | mm  | Kg  |
| SBP25WC080R4F1R0N<br>SBP25WC080R4F1B34 | 080 | 105X80  | 80/77x60  | 9  | 40 | 105 | 130 |
| SBP25WC100R4F1R0N<br>SBP25WC100R4F1B34 | 100 | 105X80  | 80/77x60  | 9  | 40 | 125 | 160 |
| SBP35WC125R4F1R0N<br>SBP35WC125R4F1B34 | 125 | 105X80  | 80/77x60  | 9  | 40 | 155 | 200 |
| SPP58WC160R4F1R0N<br>SPP58WC160R4F1D0N | 160 | 135X110 | 105X84/76 | 11 | 55 | 195 | 300 |
| SPP58WC200R4F1R0N<br>SPP58WC200R4F1D0N | 200 | 135X110 | 105X84/76 | 11 | 55 | 235 | 350 |



| fixed castor                           |     |         |           |    |     |     |
|--|-----|---------|-----------|----|-----|-----|
|  | mm  | mm      | mm        | mm | mm  | Kg  |
| FBP22WC080R4F1R0N<br>FBP22WC080R4F1B34 | 080 | 105X80  | 80/77x60  | 9  | 105 | 130 |
| FBP22WC100R4F1R0N<br>FBP22WC100R4F1B34 | 100 | 105X80  | 80/77x60  | 9  | 125 | 160 |
| FBP35WC125R4F1R0N<br>FBP35WC125R4F1B34 | 125 | 105X80  | 80/77x60  | 9  | 155 | 200 |
| FPP53WC160R4F1R0N<br>FPP53WC160R4F1D0N | 160 | 135X110 | 105X84/76 | 11 | 195 | 300 |
| FPP53WC200R4F1R0N<br>FPP53WC200R4F1D0N | 200 | 135X110 | 105X84/76 | 11 | 235 | 350 |



| swivel castor with total brake         |     |         |           |    |    |     |     |
|--|-----|---------|-----------|----|----|-----|-----|
|  | mm  | mm      | mm        | mm | mm | mm  | Kg  |
| TBP25WC080R4F1R0N<br>TBP25WC080R4F1B34 | 080 | 105X80  | 80/77x60  | 9  | 40 | 105 | 127 |
| TBP25WC100R4F1R0N<br>TBP25WC100R4F1B34 | 100 | 105X80  | 80/77x60  | 9  | 40 | 125 | 160 |
| TBP35WC125R4F1R0N<br>TBP35WC125R4F1B34 | 125 | 105X80  | 80/77x60  | 9  | 45 | 155 | 200 |
| TPP58WC160R4F1R0N<br>TPP58WC160R4F1D0N | 160 | 135X110 | 105X84/76 | 11 | 55 | 195 | 165 |
| TPP58WC200R4F1R0N<br>TPP58WC200R4F1D0N | 200 | 135X110 | 105X84/76 | 11 | 55 | 235 | 165 |

CASCOO. Industrial Castors. CASCOO Basics.  
Series R4F1



Rim: Polyamide  
Tread: High Quality Blue Elastic 75° Shore A  
Bearing: Roller Bearing / Single Ball Bearing / Double Ball Bearing  
Threadguard: Without / Small Plastic Threadguard / Without  
Load capacities: 130kg - 350kg  
Diameters: 80 mm - 200 mm  
Temperature Range: -20° C - +80° C



| swivel castor with bolt hole           |     |    |    |     |     |     |
|--|-----|----|----|-----|-----|-----|
|  | mm  | mm | mm | mm  | mm  | Kg  |
| HBH35WC080R4F1R0N<br>HBH35WC080R4F1B34 | 080 | 13 | 40 | 104 | 130 | 130 |
| HBH35WC100R4F1R0N<br>HBH35WC100R4F1B34 | 100 | 13 | 40 | 124 | 150 | 150 |
| HBH85WC125R4F1R0N<br>HBH85WC125R4F1B34 | 125 | 13 | 40 | 154 | 150 | 150 |
| HPH98WC160R4F1R0N<br>HPH98WC160R4F1D0N | 160 | 13 | 55 | 189 | 200 | 200 |
| HPH98WC200R4F1R0N<br>HPH98WC200R4F1D0N | 200 | 13 | 55 | 228 | 250 | 250 |



| swivel castor with bolt hole total brake |     |    |    |     |     |     |
|--|-----|----|----|-----|-----|-----|
|  | mm  | mm | mm | mm  | mm  | Kg  |
| BBH35WC080R4F1R0N<br>BBH35WC080R4F1B34   | 080 | 13 | 40 | 104 | 127 | 130 |
| BBH35WC100R4F1R0N<br>BBH35WC100R4F1B34   | 100 | 13 | 40 | 124 | 127 | 150 |
| BBH85WC125R4F1R0N<br>BBH85WC125R4F1B34   | 125 | 13 | 45 | 154 | 127 | 150 |
| BPH98WC160R4F1R0N<br>BPH98WC160R4F1D0N   | 160 | 13 | 55 | 189 | 165 | 200 |
| BPH98WC200R4F1R0N<br>BPH98WC200R4F1D0N   | 200 | 13 | 55 | 228 | 165 | 250 |




(160-200mm)

| wheel only               |     |    |    |    |     |     |
|--------------------------|-----|----|----|----|-----|-----|
|                          | mm  | mm | mm | mm | Ø   | Kg  |
| 080R4F1R0N<br>080R4F1B34 | 080 | 35 | 40 | 12 | M8  | 130 |
| 100R4F1R0N<br>100R4F1B34 | 100 | 35 | 40 | 12 | M8  | 160 |
| 125R4F1R0N<br>125R4F1B34 | 125 | 38 | 50 | 15 | M10 | 200 |
| 160R4F1R0N<br>160R4F1D0N | 160 | 46 | 59 | 20 | M12 | 300 |
| 200R4F1R0N<br>200R4F1D0N | 200 | 46 | 59 | 20 | M12 | 350 |

CASCOO. Industrial Castors. CASCOO Premium. Series R4E1



Rim: Polyamide  
 Tread: High Quality Blue Elastic 65° Shore A  
 Bearing: Roller Bearing / Single Ball Bearing / Double Ball Bearing  
 Threadguard: Without / Small Plastic Threadguard / Without  
 Load capacities: 130kg - 350kg  
 Diameters: 80 mm - 200 mm  
 Temperature Range: -20° C - +80° C



| swivel castor                          |     |         |           |    |    |     |     |
|--|-----|---------|-----------|----|----|-----|-----|
|  | mm  | mm      | mm        | mm | mm | mm  | Kg  |
| SPP21WC080R4E1RON<br>SPP21WC080R4E1B34 | 080 | 105X80  | 80/77x60  | 9  | 40 | 105 | 130 |
| SPP21WC100R4E1RON<br>SPP21WC100R4E1B34 | 100 | 105X80  | 80/77x60  | 9  | 40 | 128 | 160 |
| SPP31WC125R4E1RON<br>SPP31WC125R4E1B34 | 125 | 105X80  | 80/77x60  | 9  | 40 | 155 | 200 |
| SPP58WC160R4E1RON<br>SPP58WC160R4E1DON | 160 | 135X110 | 105X84/76 | 11 | 55 | 195 | 300 |
| SPP58WC200R4E1RON<br>SPP58WC200R4E1DON | 200 | 135X110 | 105X84/76 | 11 | 55 | 235 | 350 |



| fixed castor                           |     |         |           |    |     |     |
|--|-----|---------|-----------|----|-----|-----|
|  | mm  | mm      | mm        | mm | mm  | Kg  |
| FPP22WC080R4E1RON<br>FPP22WC080R4E1B34 | 080 | 105X80  | 80/77x60  | 9  | 105 | 130 |
| FPP22WC100R4E1RON<br>FPP22WC100R4E1B34 | 100 | 105X80  | 80/77x60  | 9  | 128 | 160 |
| FPP35WC125R4E1RON<br>FPP35WC125R4E1B34 | 125 | 105X80  | 80/77x60  | 9  | 155 | 200 |
| FPP53WC160R4E1RON<br>FPP53WC160R4E1DON | 160 | 135X110 | 105X84/76 | 11 | 195 | 300 |
| FPP53WC200R4E1RON<br>FPP53WC200R4E1DON | 200 | 135X110 | 105X84/76 | 11 | 235 | 350 |



| swivel castor with total brake         |     |         |           |    |    |     |     |     |
|--|-----|---------|-----------|----|----|-----|-----|-----|
|  | mm  | mm      | mm        | mm | mm | mm  | Kg  |     |
| TPP21WC080R4E1RON<br>TPP21WC080R4E1B34 | 080 | 105X80  | 80/77x60  | 9  | 40 | 105 | 127 | 130 |
| TPP21WC100R4E1RON<br>TPP21WC100R4E1B34 | 100 | 105X80  | 80/77x60  | 9  | 40 | 128 | 127 | 160 |
| TPP31WC125R4E1RON<br>TPP31WC125R4E1B34 | 125 | 105X80  | 80/77x60  | 9  | 45 | 155 | 127 | 200 |
| TPP58WC160R4E1RON<br>TPP58WC160R4E1DON | 160 | 135X110 | 105X84/76 | 11 | 55 | 195 | 165 | 300 |
| TPP58WC200R4E1RON<br>TPP58WC200R4E1DON | 200 | 135X110 | 105X84/76 | 11 | 55 | 235 | 165 | 350 |

CASCOO. Industrial Castors. CASCOO Premium. Series R4E1



Rim: Polyamide  
 Tread: High Quality Blue Elastic 65° Shore A  
 Bearing: Roller bearing / Single Ball Bearing / Double Ball Bearing  
 Threadguard: Without / Small Plastic Threadguard / Without  
 Load capacities: 130kg - 350kg  
 Diameters: 80 mm - 200 mm  
 Temperature Range: -20° C - +80° C



| swivel castor with bolt hole           |     |    |        |     |
|--|-----|----|--------|-----|
|  | mm  | mm | mm     | Kg  |
| HPH35WC080R4E1RON<br>HPH35WC080R4E1B34 | 080 | 13 | 40 104 | 130 |
| HPH35WC100R4E1RON<br>HPH35WC100R4E1B34 | 100 | 13 | 40 127 | 150 |
| HPH85WC125R4E1RON<br>HPH85WC125R4E1B34 | 125 | 13 | 40 154 | 150 |
| HPH98WC160R4E1RON<br>HPH98WC160R4E1DON | 160 | 13 | 55 189 | 200 |
| HPH98WC200R4E1RON<br>HPH98WC200R4E1DON | 200 | 13 | 55 228 | 250 |



| swivel castor with bolt hole total brake |     |    |        |     |     |
|--|-----|----|--------|-----|-----|
|  | mm  | mm | mm     | mm  | Kg  |
| BPH35WC080R4E1RON<br>BPH35WC080R4E1B34   | 080 | 13 | 40 104 | 127 | 130 |
| BPH35WC100R4E1RON<br>BPH35WC100R4E1B34   | 100 | 13 | 40 127 | 127 | 150 |
| BPH85WC125R4E1RON<br>BPH85WC125R4E1B34   | 125 | 13 | 45 154 | 127 | 150 |
| BPH98WC160R4E1RON<br>BPH98WC160R4E1DON   | 160 | 13 | 55 189 | 165 | 200 |
| BPH98WC200R4E1RON<br>BPH98WC200R4E1DON   | 200 | 13 | 55 228 | 165 | 250 |




(160-200mm)

| wheel only                |     |    |    |    |     |     |
|---------------------------|-----|----|----|----|-----|-----|
|                           | mm  | mm | mm | mm | Ø   | Kg  |
| 080R4E1RON<br>080R4E1B34  | 080 | 35 | 40 | 12 | M8  | 130 |
| 100R4E1RON<br>100R4E1B34  | 100 | 35 | 40 | 12 | M8  | 160 |
| 125R4E1RON<br>125 R4E1B34 | 125 | 38 | 50 | 15 | M10 | 200 |
| 160R4E1RON<br>160 R4E1DON | 160 | 46 | 59 | 20 | M12 | 300 |
| 200R4E1RON<br>200R4E1DON  | 200 | 46 | 59 | 20 | M12 | 350 |

CASCOO. Industrial Castors. CASCOO Premium.  
Series R4E2



Rim: Polyamide  
Tread: High Quality Grey Elastic 65° Shore A  
Bearing: Roller bearing / Single Ball Bearing  
Threadguard: Without / Small Plastic Threadguard / Without  
Load capacities: 160kg - 200kg  
Diameters: 100 mm - 125 mm  
Temperature Range: -20° C - +80° C



| swivel castor                          |    |        |          |    |    |     |    |     |
|--|----|--------|----------|----|----|-----|----|-----|
|  | mm | mm     | mm       | mm | mm | mm  | mm | Kg  |
| SPP21WC100R4E2RON<br>SPP21WC100R4E2B34 |    | 105X80 | 80/77x60 | 9  | 40 | 128 |    | 160 |
| SPP31WC125R4E2RON<br>SPP31WC125R4E2B34 |    | 105X80 | 80/77x60 | 9  | 40 | 155 |    | 200 |



| fixed castor                           |    |        |          |    |    |     |     |
|--|----|--------|----------|----|----|-----|-----|
|  | mm | mm     | mm       | mm | mm | mm  | Kg  |
| FPP22WC100R4E2RON<br>FPP22WC100R4E2B34 |    | 105X80 | 80/77x60 | 9  |    | 128 | 160 |
| FPP35WC125R4E2RON<br>FPP35WC125R4E2B34 |    | 105X80 | 80/77x60 | 9  |    | 155 | 200 |



| swivel castor with total brake         |    |        |          |    |    |     |     |     |
|--|----|--------|----------|----|----|-----|-----|-----|
|  | mm | mm     | mm       | mm | mm | mm  | mm  | Kg  |
| TPP21WC100R4E2RON<br>TPP21WC100R4E2B34 |    | 105X80 | 80/77x60 | 9  | 40 | 128 | 127 | 160 |
| TPP31WC125R4E2RON<br>TPP31WC125R4E2B34 |    | 105X80 | 80/77x60 | 9  | 45 | 155 | 127 | 200 |

CASCOO. Industrial Castors. CASCOO Premium.  
Series R4E2



Rim: Polyamide  
Tread: High Quality Grey Elastic 65° Shore A  
Bearing: Roller Bearing / Single Ball Bearing  
Threadguard: Without / Small Plastic Threadguard / Without  
Load capacities: 160kg - 200kg  
Diameters: 100 mm - 125 mm  
Temperature Range: -20° C - +80° C



| swivel castor with bolt hole           |    |    |    |     |    |     |
|--|----|----|----|-----|----|-----|
|  | mm | mm | mm | mm  | mm | Kg  |
| HPH35WC100R4E2RON<br>HPH35WC100R4E2B34 |    | 13 | 40 | 127 |    | 150 |
| HPH85WC125R4E2RON<br>HPH85WC125R4E2B34 |    | 13 | 40 | 154 |    | 150 |



| swivel castor with bolt hole total brake |    |    |    |     |     |    |     |
|--|----|----|----|-----|-----|----|-----|
|  | mm | mm | mm | mm  | mm  | mm | Kg  |
| BPH35WC100R4E2RON<br>BPH35WC100R4E2B34   |    | 13 | 40 | 127 | 127 |    | 150 |
| BPH85WC125R4E2RON<br>BPH85WC125R4E2B34   |    | 13 | 45 | 154 | 127 |    | 150 |



| wheel only               |    |    |    |    |     |     |
|--------------------------|----|----|----|----|-----|-----|
|                          | mm | mm | mm | mm | Ø   | Kg  |
| 100R4E2RON<br>100R4E2B34 |    | 35 | 40 | 12 | M8  | 160 |
| 125R4E2RON<br>125R4E2B34 |    | 38 | 50 | 15 | M10 | 200 |

## CASCOO. Industrial Castors. CASCOO Basics. Series P2G2



Also available with 85° Shore A



Rim: Polypropylene  
 Tread: Thermoplastic Rubber 65° Shore A  
 Bearing: Single Ball Bearing  
 Threadguard: Small Plastic Threadguard  
 Load capacities: 135kg - 165kg  
 Diameters: 100 mm - 125 mm  
 Temperature Range: -20° C - +60° C



| swivel castor     |     |        |          |    |    |     |     |
|-------------------|-----|--------|----------|----|----|-----|-----|
|                   | mm  | mm     | mm       | mm | mm | mm  | Kg  |
| SBP25WC100P2G2B32 | 100 | 105X80 | 80/77x60 | 9  | 40 | 125 | 135 |
| SBP35WC125P2G2B32 | 125 | 105X80 | 80/77x60 | 9  | 40 | 155 | 165 |



| fixed castor      |     |        |          |    |     |     |
|-------------------|-----|--------|----------|----|-----|-----|
|                   | mm  | mm     | mm       | mm | mm  | Kg  |
| FBP22WC100P2G2B32 | 100 | 105X80 | 80/77x60 | 9  | 125 | 135 |
| FBP32WC125P2G2B32 | 125 | 105X80 | 80/77x60 | 9  | 155 | 165 |



| swivel castor with total brake |     |        |          |    |    |     |     |     |
|--------------------------------|-----|--------|----------|----|----|-----|-----|-----|
|                                | mm  | mm     | mm       | mm | mm | mm  | Kg  |     |
| TBP25WC100P2G2B32              | 100 | 105X80 | 80/77x60 | 9  | 40 | 125 | 127 | 135 |
| TBP35WC125P2G2B32              | 125 | 105X80 | 80/77x60 | 9  | 45 | 155 | 127 | 165 |

## CASCOO. Industrial Castors. CASCOO Basics. Series P2G2



Also available with 85° Shore A



Rim: Polypropylene  
 Tread: Thermoplastic Rubber 65° Shore A  
 Bearing: Single Ball Bearing  
 Threadguard: Small Plastic Threadguard  
 Load capacities: 135kg - 165kg  
 Diameters: 100 mm - 125 mm  
 Temperature Range: -20° C - +60° C



| swivel castor with bolt hole |     |    |    |     |     |    |
|------------------------------|-----|----|----|-----|-----|----|
|                              | mm  | mm | mm | mm  | mm  | Kg |
| HBH35WC100P2G2B32            | 100 | 13 | 40 | 124 | 100 |    |
| HBH85WC125P2G2B32            | 125 | 13 | 40 | 154 | 135 |    |



| swivel castor with bolt hole |     |    |    |     |     |     |
|------------------------------|-----|----|----|-----|-----|-----|
|                              | mm  | mm | mm | mm  | mm  | Kg  |
| BBH35WC100P2G2B32            | 100 | 13 | 40 | 124 | 127 | 100 |
| BBH85WC125P2G2B32            | 125 | 13 | 45 | 154 | 127 | 135 |



| wheel only |     |    |    |    |     |     |
|------------|-----|----|----|----|-----|-----|
|            | mm  | mm | mm | mm | Ø   | Kg  |
| 100P2G2B32 | 100 | 36 | 40 | 12 | M8  | 135 |
| 125P2G2B32 | 125 | 36 | 50 | 15 | M10 | 165 |

## CASCOO. Industrial Castors. CASCOO Premium. Series P2G2



Also available with 85° Shore A

Rim: Polypropylene  
 Tread: Thermoplastic Rubber 65° Shore A  
 Bearing: Single Ball Bearing  
 Threadguard: Small Plastic Threadguard  
 Load capacities: 200kg - 250kg  
 Diameters: 160 mm - 200 mm  
 Temperature Range: -20° C - +60° C



| swivel castor     |    |     |         |           |    |    |     |     |
|-------------------|----|-----|---------|-----------|----|----|-----|-----|
|                   | mm | mm  | mm      | mm        | mm | mm | mm  | Kg  |
| SPP58WC160P2G2B32 |    | 160 | 135x110 | 105x84/76 | 11 | 55 | 195 | 200 |
| SPP58WC200P2G2B32 |    | 200 | 135x110 | 105x84/76 | 11 | 55 | 235 | 250 |



| fixed castor      |    |     |         |           |    |     |     |
|-------------------|----|-----|---------|-----------|----|-----|-----|
|                   | mm | mm  | mm      | mm        | mm | Kg  |     |
| FPP55WC160P2G2B32 |    | 160 | 135x110 | 105x84/76 | 11 | 195 | 200 |
| FPP55WC200P2G2B32 |    | 200 | 135x110 | 105x84/76 | 11 | 235 | 250 |



| swivel castor with total brake |    |     |         |           |    |    |     |     |     |
|--------------------------------|----|-----|---------|-----------|----|----|-----|-----|-----|
|                                | mm | mm  | mm      | mm        | mm | mm | mm  | Kg  |     |
| TPP58WC160P2G2B32              |    | 160 | 135x110 | 105x84/76 | 11 | 55 | 195 | 165 | 200 |
| TPP58WC200P2G2B32              |    | 200 | 135x110 | 105x84/76 | 11 | 55 | 235 | 165 | 250 |




| wheel only |    |     |    |    |    |     |     |
|------------|----|-----|----|----|----|-----|-----|
|            | mm | mm  | mm | mm | Ø  | Kg  |     |
| 160P2G2B32 |    | 160 | 40 | 59 | 20 | M12 | 200 |
| 200P2G2B32 |    | 200 | 40 | 59 | 20 | M12 | 250 |

## CASCOO. Industrial Castors. CASCOO Basics. Series P2D2



Also available with ESD version

Rim: Polypropylene  
 Tread: Thermoplastic Rubber 65° Shore A  
 Bearing: Single Ball Bearing  
 Threadguard: Small Plastic threadguard  
 Load capacities: 165kg  
 Diameters: 125 mm  
 Temperature Range: -20° C - +60° C



| swivel castor     |    |     |        |          |    |    |     |     |
|-------------------|----|-----|--------|----------|----|----|-----|-----|
|                   | mm | mm  | mm     | mm       | mm | mm | mm  | Kg  |
| SBP35WC125P2D2B32 |    | 125 | 105X80 | 80/77x60 | 9  | 40 | 155 | 165 |



| fixed castor      |    |     |        |          |    |     |     |
|-------------------|----|-----|--------|----------|----|-----|-----|
|                   | mm | mm  | mm     | mm       | mm | Kg  |     |
| FBP32WC125P2D2B32 |    | 125 | 105X80 | 80/77x60 | 9  | 155 | 165 |




| swivel castor with total brake |    |     |        |          |    |    |     |     |     |
|--------------------------------|----|-----|--------|----------|----|----|-----|-----|-----|
|                                | mm | mm  | mm     | mm       | mm | mm | mm  | Kg  |     |
| TBP35WC125P2D2B32              |    | 125 | 105X80 | 80/77x60 | 9  | 45 | 155 | 127 | 165 |



| wheel only |    |     |    |    |    |     |     |
|------------|----|-----|----|----|----|-----|-----|
|            | mm | mm  | mm | mm | Ø  | Kg  |     |
| 125P2D2B32 |    | 125 | 36 | 50 | 15 | M10 | 165 |

CASCOO. Industrial Castors. CASCOO Basics.  
Series P2V2



Rim: Polypropylene  
Tread: Thermoplastic Rubber 85° Shore A  
Bearing: Roller Bearing / Single Ball Bearing  
Threadguard: Small Metal Threadguard / Small Plastic Threadguard  
Load capacities: 80kg - 135kg  
Diameters: 80 mm - 125 mm  
Temperature Range: -20° C - +60° C



| swivel castor                          |    |        |          |    |    |     |    |     |
|--|----|--------|----------|----|----|-----|----|-----|
|  | mm | mm     | mm       | mm | mm | mm  | mm | Kg  |
| SBP25WC080P2V2R1W<br>SBP25WC080P2V2B32 |    | 105X80 | 80/77x60 | 9  | 40 | 105 |    | 80  |
| SBP25WC100P2V2R1W<br>SBP25WC100P2V2B32 |    | 105X80 | 80/77x60 | 9  | 40 | 125 |    | 100 |
| SBP35WC125P2V2R1W<br>SBP35WC125P2V2B32 |    | 105X80 | 80/77x60 | 9  | 40 | 155 |    | 135 |



| fixed castor                           |    |        |          |    |     |     |
|--|----|--------|----------|----|-----|-----|
|  | mm | mm     | mm       | mm | mm  | Kg  |
| FBP22WC080P2V2R1W<br>FBP22WC080P2V2B32 |    | 105X80 | 80/77x60 | 9  | 105 | 080 |
| FBP22WC100P2V2R1W<br>FBP22WC100P2V2B32 |    | 105X80 | 80/77x60 | 9  | 125 | 100 |
| FBP32WC125P2V2R1W<br>FBP32WC125P2V2B32 |    | 105X80 | 80/77x60 | 9  | 155 | 135 |




| swivel castor with total brake         |    |        |          |    |    |     |     |     |
|--|----|--------|----------|----|----|-----|-----|-----|
|  | mm | mm     | mm       | mm | mm | mm  | mm  | Kg  |
| TBP25WC080P2V2R1W<br>TBP25WC080P2V2B32 |    | 105X80 | 80/77x60 | 9  | 40 | 105 | 127 | 80  |
| TBP25WC100P2V2R1W<br>TBP25WC100P2V2B32 |    | 105X80 | 80/77x60 | 9  | 40 | 125 | 127 | 100 |
| TBP35WC125P2V2R1W<br>TBP35WC125P2V2B32 |    | 105X80 | 80/77x60 | 9  | 45 | 155 | 127 | 135 |



| wheel only               |    |    |    |          |     |     |
|--------------------------|----|----|----|----------|-----|-----|
|                          | mm | mm | mm | mm       | Ø   | Kg  |
| 080P2V2R1W<br>080P2V2B32 |    | 32 | 40 | 12<br>15 | M8  | 80  |
| 100P2V2R1W<br>100P2V2B32 |    | 32 | 40 | 12<br>15 | M8  | 100 |
| 125P2V2R1W<br>125P2V2B32 |    | 32 | 50 | 15       | M10 | 135 |

CASCOO. Industrial Castors. CASCOO Premium.  
Series P2V2



Rim: Polypropylene  
Tread: Thermoplastic Rubber 85° Shore A  
Bearing: Roller Bearing / Single Ball Bearing  
Threadguard: Small Metal Threadguard / Small Plastic Threadguard  
Load capacities: 200kg  
Diameters: 160 mm - 200 mm  
Temperature Range: -20° C - +60° C



| swivel castor                          |    |         |           |    |    |     |    |     |
|--|----|---------|-----------|----|----|-----|----|-----|
|  | mm | mm      | mm        | mm | mm | mm  | mm | Kg  |
| SPP58WC160P2V2R1W<br>SPP58WC160P2V2B32 |    | 135x110 | 105x84/76 | 11 | 55 | 195 |    | 200 |
| SPP58WC200P2V2R1W<br>SPP58WC200P2V2D32 |    | 135x110 | 105x84/76 | 11 | 55 | 235 |    | 200 |



| fixed castor                           |    |         |           |    |     |     |
|--|----|---------|-----------|----|-----|-----|
|  | mm | mm      | mm        | mm | mm  | Kg  |
| FPP55WC160P2V2R1W<br>FPP55WC160P2V2B32 |    | 135x110 | 105x84/76 | 11 | 195 | 200 |
| FPP55WC200P2V2R1W<br>FPP55WC200P2V2D32 |    | 135x110 | 105x84/76 | 11 | 235 | 200 |



| swivel castor with total brake         |    |         |           |    |    |     |     |     |
|--|----|---------|-----------|----|----|-----|-----|-----|
|  | mm | mm      | mm        | mm | mm | mm  | mm  | Kg  |
| TPP58WC160P2V2R1W<br>TPP58WC160P2V2B32 |    | 135x110 | 105x84/76 | 11 | 55 | 195 | 165 | 200 |
| TPP58WC200P2V2R1W<br>TPP58WC200P2V2D32 |    | 135x110 | 105x84/76 | 11 | 55 | 235 | 165 | 200 |




| wheel only               |    |    |    |    |     |     |
|--------------------------|----|----|----|----|-----|-----|
|                          | mm | mm | mm | mm | Ø   | Kg  |
| 160P2V2R1W<br>160P2V2B32 |    | 50 | 59 | 20 | M12 | 200 |
| 200P2V2R1W<br>200P2V2D32 |    | 50 | 59 | 20 | M12 | 200 |

## CASCOO. Industrial Castors. CASCOO Basics. Series P4S4

Also available with CASCOO Premium or CASCOO Flex



Rim: Polypropylene  
Tread: Solid Black Rubber 85° Shore A (Reach Conformity)  
Bearing: Roller Bearing  
Threadguard: Without  
Load capacities: 70 kg - 205kg  
Diameters: 80 mm - 200mm  
Temperature Range: -20° C - +60° C



| swivel castor     |     |         |           |    |    |     |     |
|-------------------|-----|---------|-----------|----|----|-----|-----|
|                   | mm  | mm      | mm        | mm | mm | mm  | Kg  |
| SBP26WC080P4S4R0N | 080 | 105X80  | 80/77x60  | 9  | 40 | 105 | 70  |
| SBP26WC100P4S4R0N | 100 | 105X80  | 80/77x60  | 9  | 40 | 125 | 75  |
| SBP35WC125P4S4R0N | 125 | 105X80  | 80/77x60  | 9  | 40 | 155 | 100 |
| SPP58WC160P4S4R0N | 160 | 135X110 | 105X84/76 | 11 | 55 | 195 | 135 |
| SPP58WC200P4S4R0N | 200 | 135X110 | 105X84/76 | 11 | 55 | 235 | 205 |



| fixed castor      |     |         |           |    |     |     |
|-------------------|-----|---------|-----------|----|-----|-----|
|                   | mm  | mm      | mm        | mm | mm  | Kg  |
| FBP22WC080P4S4R0N | 080 | 105X80  | 80/77x60  | 9  | 105 | 70  |
| FBP22WC100P4S4R0N | 100 | 105X80  | 80/77x60  | 9  | 125 | 75  |
| FBP32WC125P4S4R0N | 125 | 105X80  | 80/77x60  | 9  | 155 | 100 |
| FPP55WC160P4S4R0N | 160 | 135X110 | 105X84/76 | 11 | 195 | 135 |
| FPP55WC200P4S4R0N | 200 | 135X110 | 105X84/76 | 11 | 235 | 205 |



| swivel castor with total brake |     |         |           |    |    |     |     |     |
|--------------------------------|-----|---------|-----------|----|----|-----|-----|-----|
|                                | mm  | mm      | mm        | mm | mm | mm  | mm  | Kg  |
| TBP25WC080P4S4R0N              | 080 | 105X80  | 80/77x60  | 9  | 40 | 105 | 127 | 70  |
| TBP25WC100P4S4R0N              | 100 | 105X80  | 80/77x60  | 9  | 40 | 125 | 127 | 75  |
| TBP35WC125P4S4R0N              | 125 | 105X80  | 80/77x60  | 9  | 45 | 155 | 127 | 100 |
| TPP58WC160P4S4R0N              | 160 | 135X110 | 105X84/76 | 11 | 55 | 195 | 165 | 135 |
| TPP58WC200P4S4R0N              | 200 | 135X110 | 105X84/76 | 11 | 55 | 235 | 165 | 205 |

## CASCOO. Industrial Castors. CASCOO Basics. Series P4S4

Also available with CASCOO Premium or CASCOO Flex



Rim: Polypropylene  
Tread: Solid Black Rubber 85° Shore A (Reach Conformity)  
Bearing: Roller Bearing  
Threadguard: Without  
Load capacities: 70 kg - 205kg  
Diameters: 80 mm - 200mm  
Temperature Range: -20° C - +60° C



| swivel castor with bolt hole |     |    |    |     |     |
|------------------------------|-----|----|----|-----|-----|
|                              | mm  | mm | mm | mm  | Kg  |
| HBH36WC080P4S4R0N            | 080 | 13 | 40 | 104 | 70  |
| HBH36WC100P4S4R0N            | 100 | 13 | 40 | 124 | 75  |
| HBH85WC125P4S4R0N            | 125 | 13 | 40 | 154 | 100 |
| HPH98WC160P4S4R0N            | 160 | 13 | 55 | 189 | 135 |
| HPH98WC200P4S4R0N            | 200 | 13 | 55 | 228 | 205 |



| swivel castor with bolt hole total brake |     |    |    |     |     |     |
|--|-----|----|----|-----|-----|-----|
|  | mm  | mm | mm | mm  | mm  | Kg  |
| BBH35WC080P4S4R0N                        | 080 | 13 | 40 | 104 | 127 | 70  |
| BBH35WC100P4S4R0N                        | 100 | 13 | 40 | 124 | 127 | 75  |
| BBH85WC125P4S4R0N                        | 125 | 13 | 45 | 154 | 127 | 100 |
| BPH98WC160P4S4R0N                        | 160 | 13 | 55 | 189 | 165 | 135 |
| BPH98WC200P4S4R0N                        | 200 | 13 | 55 | 228 | 165 | 205 |




| wheel only               |     |    |    |    |           |     |
|--------------------------|-----|----|----|----|-----------|-----|
|                          | mm  | mm | mm | mm | Ø         | Kg  |
| 080P4S4R0N               | 080 | 35 | 40 | 12 | M8        | 70  |
| 100P4S4R0N               | 100 | 35 | 40 | 12 | M8        | 75  |
| 125X4S4R0N<br>125P4S4R0N | 125 | 38 | 50 | 12 | M8<br>M10 | 100 |
| 160P4S4R0N               | 160 | 40 | 59 | 20 | M12       | 135 |
| 200P4S4R0N               | 200 | 50 | 59 | 20 | M12       | 205 |

## CASCOO. Industrial Castors. CASCOO Basics. Series P4R2

Also available with CASCOO Premium or CASCOO Flex



Rim: Polypropylene  
 Tread: Solid Grey Rubber 85° Shore A (PAH Conformity)  
 Bearing: Roller Bearing  
 Threadguard: Without  
 Load capacities: 70kg - 205kg  
 Diameters: 80 mm - 200mm  
 Temperature Range: -20° C - +60° C



| swivel castor     |     |         |           |    |    |     |    |     |
|-------------------|-----|---------|-----------|----|----|-----|----|-----|
|                   | mm  | mm      | mm        | mm | mm | mm  | mm | Kg  |
| SBP26WC080P4R2R0N | 080 | 105X80  | 80/77x60  | 9  | 40 | 105 |    | 70  |
| SBP26WC100P4R2R0N | 100 | 105X80  | 80/77x60  | 9  | 40 | 125 |    | 75  |
| SBP35WC125P4R2R0N | 125 | 105X80  | 80/77x60  | 9  | 40 | 155 |    | 100 |
| SPP58WC160P4R2R0N | 160 | 135X110 | 105X84/76 | 11 | 55 | 195 |    | 135 |
| SPP58WC200P4R2R0N | 200 | 135X110 | 105X84/76 | 11 | 55 | 235 |    | 205 |



| fixed castor      |     |         |           |    |     |     |
|-------------------|-----|---------|-----------|----|-----|-----|
|                   | mm  | mm      | mm        | mm | mm  | Kg  |
| FBP22WC080P4R2R0N | 080 | 105X80  | 80/77x60  | 9  | 105 | 70  |
| FBP22WC100P4R2R0N | 100 | 105X80  | 80/77x60  | 9  | 125 | 75  |
| FBP32WC125P4R2R0N | 125 | 105X80  | 80/77x60  | 9  | 155 | 100 |
| FPP55WC160P4R2R0N | 160 | 135X110 | 105x84/76 | 11 | 195 | 135 |
| FPP55WC200P4R2R0N | 200 | 135X110 | 105x84/76 | 11 | 235 | 205 |



| swivel castor with total brake |     |         |           |    |    |     |     |     |
|--------------------------------|-----|---------|-----------|----|----|-----|-----|-----|
|                                | mm  | mm      | mm        | mm | mm | mm  | mm  | Kg  |
| TBP25WC080P4R2R0N              | 080 | 105X80  | 80/77x60  | 9  | 40 | 105 | 127 | 70  |
| TBP25WC100P4R2R0N              | 100 | 105X80  | 80/77x60  | 9  | 40 | 125 | 127 | 75  |
| TBP35WC125P4R2R0N              | 125 | 105X80  | 80/77x60  | 9  | 45 | 155 | 127 | 100 |
| TPP58WC160P4R2R0N              | 160 | 135X110 | 105x84/76 | 11 | 55 | 195 | 165 | 135 |
| TPP58WC200P4R2R0N              | 200 | 135X110 | 105x84/76 | 11 | 55 | 235 | 165 | 205 |

## CASCOO. Industrial Castors. CASCOO Basics. Series P4R2

Also available with CASCOO Premium or CASCOO Flex



Rim: Polypropylene  
 Tread: Solid Grey Rubber 85° Shore A (PAH Conformity)  
 Bearing: Roller Bearing  
 Threadguard: Without  
 Load capacities: 70kg - 205kg  
 Diameters: 80 mm - 200mm  
 Temperature Range: -20° C - +60° C



| swivel castor with bolt hole |     |    |    |     |    |     |
|------------------------------|-----|----|----|-----|----|-----|
|                              | mm  | mm | mm | mm  | mm | Kg  |
| HBH36WC080P4R2R0N            | 080 | 13 | 40 | 104 |    | 70  |
| HBH36WC100P4R2R0N            | 100 | 13 | 40 | 124 |    | 75  |
| HBH85WC125P4R2R0N            | 125 | 13 | 40 | 154 |    | 100 |
| HPH98WC160P4R2R0N            | 160 | 13 | 55 | 189 |    | 135 |
| HPH98WC200P4R2R0N            | 200 | 13 | 55 | 228 |    | 205 |



| swivel castor with bolt hole total brake |     |    |    |     |     |     |
|--|-----|----|----|-----|-----|-----|
|  | mm  | mm | mm | mm  | mm  | Kg  |
| BBH35WC080P4R2R0N                        | 080 | 13 | 40 | 104 | 127 | 70  |
| BBH35WC100P4R2R0N                        | 100 | 13 | 40 | 124 | 127 | 75  |
| BBH85WC125P4R2R0N                        | 125 | 13 | 45 | 154 | 127 | 100 |
| BPH98WC160P4R2R0N                        | 160 | 13 | 55 | 189 | 165 | 135 |
| BPH98WC200P4R2R0N                        | 200 | 13 | 55 | 228 | 165 | 205 |




| wheel only               |     |    |    |    |           |     |
|--------------------------|-----|----|----|----|-----------|-----|
|                          | mm  | mm | mm | mm | Ø         | Kg  |
| 080P4R2R0N               | 080 | 35 | 40 | 12 | M8        | 70  |
| 100P4R2R0N               | 100 | 35 | 40 | 12 | M8        | 75  |
| 125X4R2R0N<br>125P4R2R0N | 125 | 38 | 50 | 12 | M8<br>M10 | 100 |
| 160P4R2R0N               | 160 | 40 | 59 | 20 | M12       | 135 |
| 200P4R2R0N               | 200 | 50 | 59 | 20 | M12       | 205 |

## CASCOO. Industrial Castors. CASCOO Basics. Series SWS4



Also available with CASCOO Premium or CASCOO Flex

Rim: Steel Sheet  
 Tread: Solid Black Rubber 85° Shore A (Reach Conformity)  
 Bearing: Roller Bearing  
 Threadguard: Without  
 Load capacities: 70 kg - 205kg  
 Diameters: 80 mm - 200mm  
 Temperature Range: -20° C - +60° C



| swivel castor     |     |         |           |    |    |     |    |     |
|-------------------|-----|---------|-----------|----|----|-----|----|-----|
|                   | mm  | mm      | mm        | mm | mm | mm  | mm | Kg  |
| SBP26WC080SWS4R0N | 080 | 105X80  | 80/77x60  | 9  | 40 | 105 |    | 70  |
| SBP26WC100SWS4R0N | 100 | 105X80  | 80/77x60  | 9  | 40 | 125 |    | 75  |
| SBP35WC125SWS4R0N | 125 | 105X80  | 80/77x60  | 9  | 40 | 155 |    | 100 |
| SPP58WC160SWS4R0N | 160 | 135X110 | 105X84/76 | 11 | 55 | 195 |    | 135 |
| SPP58WC200SWS4R0N | 200 | 135X110 | 105X84/76 | 11 | 55 | 235 |    | 205 |



| fixed castor      |     |         |           |    |    |     |     |
|-------------------|-----|---------|-----------|----|----|-----|-----|
|                   | mm  | mm      | mm        | mm | mm | mm  | Kg  |
| FBP22WC080SWS4R0N | 080 | 105X80  | 80/77x60  | 9  |    | 105 | 70  |
| FBP22WC100SWS4R0N | 100 | 105X80  | 80/77x60  | 9  |    | 125 | 75  |
| FBP32WC125SWS4R0N | 125 | 105X80  | 80/77x60  | 9  |    | 155 | 100 |
| FPP55WC160SWS4R0N | 160 | 135X110 | 105x84/76 | 11 |    | 195 | 135 |
| FPP55WC200SWS4R0N | 200 | 135X110 | 105x84/76 | 11 |    | 235 | 205 |



| swivel castor with total brake |     |         |           |    |    |     |     |     |
|--------------------------------|-----|---------|-----------|----|----|-----|-----|-----|
|                                | mm  | mm      | mm        | mm | mm | mm  | mm  | Kg  |
| TBP25WC080SWS4R0N              | 080 | 105X80  | 80/77x60  | 9  | 40 | 105 | 127 | 70  |
| TBP25WC100SWS4R0N              | 100 | 105X80  | 80/77x60  | 9  | 40 | 125 | 127 | 75  |
| TBP35WC125SWS4R0N              | 125 | 105X80  | 80/77x60  | 9  | 45 | 155 | 127 | 100 |
| TPP58WC160SWS4R0N              | 160 | 135X110 | 105x84/76 | 11 | 55 | 195 | 165 | 135 |
| TPP58WC200SWS4R0N              | 200 | 135X110 | 105x84/76 | 11 | 55 | 235 | 165 | 205 |

## CASCOO. Industrial Castors. CASCOO Basics. Series SWS4



Also available with CASCOO Premium or CASCOO Flex

Rim: Steel Sheet  
 Tread: Solid Black Rubber 85° Shore A (Reach Conformity)  
 Bearing: Roller Bearing  
 Threadguard: Without  
 Load capacities: 70 kg - 205kg  
 Diameters: 80 mm - 200mm  
 Temperature Range: -20° C - +60° C



| swivel castor with bolt hole |     |    |    |    |    |     |     |
|------------------------------|-----|----|----|----|----|-----|-----|
|                              | mm  | mm | mm | mm | mm | mm  | Kg  |
| HBH36WC080SWS4R0N            | 080 | 13 |    |    | 40 | 104 | 70  |
| HBH36WC100SWS4R0N            | 100 | 13 |    |    | 40 | 124 | 75  |
| HBH85WC125SWS4R0N            | 125 | 13 |    |    | 40 | 154 | 100 |
| HPH98WC160SWS4R0N            | 160 | 13 |    |    | 55 | 189 | 135 |
| HPH98WC200SWS4R0N            | 200 | 13 |    |    | 55 | 228 | 205 |




| swivel castor with bolt hole total brake |     |    |    |    |    |     |     |     |
|--|-----|----|----|----|----|-----|-----|-----|
|  | mm  | mm | mm | mm | mm | mm  | mm  | Kg  |
| BBH35WC080SWS4R0N                        | 080 | 13 |    |    | 40 | 104 | 127 | 70  |
| BBH35WC100SWS4R0N                        | 100 | 13 |    |    | 40 | 124 | 127 | 75  |
| BBH85WC125SWS4R0N                        | 125 | 13 |    |    | 45 | 154 | 127 | 100 |
| BPH98WC160SWS4R0N                        | 160 | 13 |    |    | 55 | 189 | 165 | 135 |
| BPH98WC200SWS4R0N                        | 200 | 13 |    |    | 55 | 228 | 165 | 205 |



| wheel only               |     |    |    |    |    |           |     |
|--------------------------|-----|----|----|----|----|-----------|-----|
|                          | mm  | mm | mm | mm | mm | Ø         | Kg  |
| 080SWS4R0N               | 080 | 27 | 40 | 12 |    | M 8       | 70  |
| 100SWS4R0N               | 100 | 27 | 40 | 12 |    | M 8       | 75  |
| 125KWS4R0N<br>125SWS4R0N | 125 | 38 | 50 | 12 |    | M8<br>M10 | 100 |
| 160SWS4R0N               | 160 | 40 | 59 | 20 |    | M12       | 135 |
| 200SWS4R0N               | 200 | 50 | 59 | 20 |    | M12       | 205 |

## CASCOO. Industrial Castors. CASCOO Basics. Series SWR2

Also available with CASCOO Premium or CASCOO Flex



Rim: Steel Sheet  
 Tread: Solid Grey Rubber 85° Shore A (PAH Conformity)  
 Bearing: Roller Bearing  
 Threadguard: Without  
 Load capacities: 70 kg - 205kg  
 Diameters: 80 mm - 200mm  
 Temperature Range: -20° C - +60° C



| swivel castor     |     |         |           |    |    |     |    |     |
|-------------------|-----|---------|-----------|----|----|-----|----|-----|
|                   | mm  | mm      | mm        | mm | mm | mm  | mm | Kg  |
| SBP26WC080SWR2RON | 080 | 105X80  | 80/77x60  | 9  | 40 | 105 |    | 70  |
| SBP26WC100SWR2RON | 100 | 105X80  | 80/77x60  | 9  | 40 | 125 |    | 75  |
| SBP35WC125SWR2RON | 125 | 105X80  | 80/77x60  | 9  | 40 | 155 |    | 100 |
| SPP58WC160SWR2RON | 160 | 135X110 | 105x84/76 | 11 | 55 | 195 |    | 135 |
| SPP58WC200SWR2RON | 200 | 135X110 | 105x84/76 | 11 | 55 | 235 |    | 205 |



| fixed castor      |     |         |           |    |    |     |     |
|-------------------|-----|---------|-----------|----|----|-----|-----|
|                   | mm  | mm      | mm        | mm | mm | mm  | Kg  |
| FBP22WC080SWR2RON | 080 | 105X80  | 80/77x60  | 9  |    | 105 | 70  |
| FBP22WC100SWR2RON | 100 | 105X80  | 80/77x60  | 9  |    | 125 | 75  |
| FBP32WC125SWR2RON | 125 | 105X80  | 80/77x60  | 9  |    | 155 | 100 |
| FPP55WC160SWR2RON | 160 | 135X110 | 105x84/76 | 11 |    | 195 | 135 |
| FPP55WC200SWR2RON | 200 | 135X110 | 105x84/76 | 11 |    | 235 | 205 |



| swivel castor with total brake |     |         |           |    |    |     |     |     |
|--------------------------------|-----|---------|-----------|----|----|-----|-----|-----|
|                                | mm  | mm      | mm        | mm | mm | mm  | mm  | Kg  |
| TBP25WC080SWR2RON              | 080 | 105X80  | 80/77x60  | 9  | 40 | 105 | 127 | 70  |
| TBP25WC100SWR2RON              | 100 | 105X80  | 80/77x60  | 9  | 40 | 125 | 127 | 75  |
| TBP35WC125SWR2RON              | 125 | 105X80  | 80/77x60  | 9  | 45 | 155 | 127 | 100 |
| TPP58WC160SWR2RON              | 160 | 135X110 | 105x84/76 | 11 | 55 | 195 | 165 | 135 |
| TPP58WC200SWR2RON              | 200 | 135X110 | 105x84/76 | 11 | 55 | 235 | 165 | 205 |

## CASCOO. Industrial Castors. CASCOO Basics. Series SWR2

Also available with CASCOO Premium or CASCOO Flex



Rim: Steel Sheet  
 Tread: Solid Grey Rubber 85° Shore A (PAH Conformity)  
 Bearing: Roller Bearing  
 Threadguard: Without  
 Load capacities: 70 kg - 205kg  
 Diameters: 80 mm - 200mm  
 Temperature Range: -20° C - +60° C



| swivel castor with bolt hole |     |    |    |     |    |    |     |
|------------------------------|-----|----|----|-----|----|----|-----|
|                              | mm  | mm | mm | mm  | mm | mm | Kg  |
| HBH36WC080SWR2RON            | 080 | 13 | 40 | 104 |    |    | 70  |
| HBH36WC100SWR2RON            | 100 | 13 | 40 | 124 |    |    | 75  |
| HBH85WC125SWR2RON            | 125 | 13 | 40 | 154 |    |    | 100 |
| HPH98WC160SWR2RON            | 160 | 13 | 55 | 189 |    |    | 135 |
| HPH98CC200SWR2RON            | 200 | 13 | 55 | 228 |    |    | 205 |



| swivel castor with bolt hole total brake |     |    |    |     |     |    |     |
|--|-----|----|----|-----|-----|----|-----|
|  | mm  | mm | mm | mm  | mm  | mm | Kg  |
| BBH35WC080SWR2RON                        | 080 | 13 | 40 | 104 | 127 |    | 70  |
| BBH35WC100SWR2RON                        | 100 | 13 | 40 | 124 | 127 |    | 75  |
| BBH85WC125SWR2RON                        | 125 | 13 | 45 | 154 | 127 |    | 100 |
| BPH98WC160SWR2RON                        | 160 | 13 | 55 | 189 | 165 |    | 135 |
| BPH98WC200SWR2RON                        | 200 | 13 | 55 | 228 | 165 |    | 205 |




| wheel only               |     |    |    |    |    |           |     |
|--------------------------|-----|----|----|----|----|-----------|-----|
|                          | mm  | mm | mm | mm | mm | Ø         | Kg  |
| 080SWR2RON               | 080 | 27 | 40 | 12 |    | M8        | 70  |
| 100SWR2RON               | 100 | 27 | 40 | 12 |    | M8        | 75  |
| 125KWR2RON<br>125SWR2RON | 125 | 38 | 50 | 12 |    | M8<br>M10 | 100 |
| 160SWR2RON               | 160 | 40 | 59 | 20 |    | M12       | 135 |
| 200SWR2RON               | 200 | 50 | 59 | 20 |    | M12       | 205 |

## CASCOO. Industrial Castors. CASCOO Premium. Series AAE2



Alternative colors on demand



Rim: Aluminium  
 Tread: High Quality Grey Elastic 65° Shore A  
 Bearing: Double Ball Bearing  
 Threadguard: Without  
 Load capacities: 200 kg - 250kg  
 Diameters: 100 mm - 125mm  
 Temperature Range: -20° C - +80° C



| swivel castor     |    |     |         |           |    |    |     |    |     |
|-------------------|----|-----|---------|-----------|----|----|-----|----|-----|
|                   | mm | mm  | mm      | mm        | mm | mm | mm  | mm | Kg  |
| SPP37WC100AAE2D0N |    | 100 | 105X80  | 80/77x60  | 9  | 40 | 128 |    | 200 |
| SPP47WC100AAE2D0N |    | 100 | 135X110 | 105x84/76 | 11 | 50 | 128 |    | 200 |
| SPP37WC125AAE2D0N |    | 125 | 105X80  | 80/77x60  | 9  | 40 | 155 |    | 250 |
| SPP47WC125AAE2D0N |    | 125 | 135X110 | 105X84/76 | 11 | 50 | 155 |    | 250 |



| fixed castor      |    |     |         |           |    |     |     |
|-------------------|----|-----|---------|-----------|----|-----|-----|
|                   | mm | mm  | mm      | mm        | mm | mm  | Kg  |
| FPP33WC100AAE2D0N |    | 100 | 105X80  | 80/77x60  | 9  | 128 | 200 |
| FPP43WC100AAE2D0N |    | 100 | 135X110 | 105x84/76 | 11 | 128 | 200 |
| FPP33WC125AAE2D0N |    | 125 | 105X80  | 80/77x60  | 9  | 155 | 250 |
| FPP43WC125AAE2D0N |    | 125 | 135X110 | 105x84/76 | 11 | 155 | 250 |



| swivel castor with total brake |    |     |         |           |    |    |     |     |     |
|--------------------------------|----|-----|---------|-----------|----|----|-----|-----|-----|
|                                | mm | mm  | mm      | mm        | mm | mm | mm  | mm  | Kg  |
| TPP37WC100AAE2D0N              |    | 100 | 105X80  | 80/77x60  | 9  | 40 | 128 | 127 | 200 |
| TPP47WC100AAE2D0N              |    | 100 | 135X110 | 105x84/76 | 11 | 55 | 128 | 154 | 200 |
| TPP37WC125AAE2D0N              |    | 125 | 105X80  | 80/77x60  | 9  | 45 | 155 | 127 | 250 |
| TPP47WC125AAE2D0N              |    | 125 | 135X110 | 105x84/76 | 11 | 55 | 155 | 154 | 250 |



| wheel only |    |     |    |    |    |     |     |
|------------|----|-----|----|----|----|-----|-----|
|            | mm | mm  | mm | mm | Ø  | Kg  |     |
| 100AAE2D0N |    | 100 | 40 | 40 | 12 | M8  | 200 |
| 125AAE2D0N |    | 125 | 40 | 50 | 15 | M10 | 250 |

## CASCOO. Industrial Castors. CASCOO Premium. Series AAU5



Black Theater Version available



Rim: Aluminium  
 Tread: Brown Polyurethane 92° Shore A  
 Bearing: Double Ball Bearing  
 Threadguard: Without  
 Load capacities: 200 kg - 300kg  
 Diameters: 100 mm - 125mm  
 Temperature Range: -20° C - +80° C



| swivel castor     |    |     |         |           |    |    |     |    |     |
|-------------------|----|-----|---------|-----------|----|----|-----|----|-----|
|                   | mm | mm  | mm      | mm        | mm | mm | mm  | mm | Kg  |
| SPP37WC100AAU5D0N |    | 100 | 105X80  | 80/77x60  | 9  | 40 | 128 |    | 250 |
| SPP47WC100AAU5D0N |    | 100 | 135X110 | 105x84/76 | 11 | 50 | 128 |    | 250 |
| SPP37WC125AAU5D0N |    | 125 | 105X80  | 80/77x60  | 9  | 40 | 155 |    | 300 |
| SPP47WC125AAU5D0N |    | 125 | 135X110 | 105x84/76 | 11 | 50 | 155 |    | 300 |



| fixed castor      |    |     |         |           |    |     |     |
|-------------------|----|-----|---------|-----------|----|-----|-----|
|                   | mm | mm  | mm      | mm        | mm | mm  | Kg  |
| FPP33WC100AAU5D0N |    | 100 | 105X80  | 80/77x60  | 9  | 128 | 250 |
| FPP43WC100AAU5D0N |    | 100 | 135X110 | 105x84/76 | 11 | 128 | 250 |
| FPP33WC125AAU5D0N |    | 125 | 105X80  | 80/77x60  | 9  | 155 | 300 |
| FPP43WC125AAU5D0N |    | 125 | 135X110 | 105x84/76 | 11 | 155 | 300 |



| swivel castor with total brake |    |     |         |           |    |    |     |     |     |
|--------------------------------|----|-----|---------|-----------|----|----|-----|-----|-----|
|                                | mm | mm  | mm      | mm        | mm | mm | mm  | mm  | Kg  |
| TPP37WC100AAU5D0N              |    | 100 | 105X80  | 80/77x60  | 9  | 40 | 128 | 127 | 250 |
| TPP47WC100AAU5D0N              |    | 100 | 135X110 | 105x84/76 | 11 | 55 | 128 | 154 | 250 |
| TPP37WC125AAU5D0N              |    | 125 | 105X80  | 80/77x60  | 9  | 45 | 155 | 127 | 300 |
| TPP47WC125AAU5D0N              |    | 125 | 135X110 | 105x84/76 | 11 | 55 | 155 | 154 | 300 |



| wheel only |    |     |    |    |    |     |     |
|------------|----|-----|----|----|----|-----|-----|
|            | mm | mm  | mm | mm | Ø  | Kg  |     |
| 100AAU5D0N |    | 100 | 40 | 40 | 12 | M8  | 250 |
| 125AAU5D0N |    | 125 | 40 | 50 | 15 | M10 | 300 |




CASCOO. Heavy Duty Castors.



Heavy loads? No problem with our castors. With load capacity up to 1000 kg, our castors move your goods to the destination safely and quickly.

## CASCOO. Medium Heavy Duty Castors. Series BAU5



Rim: Aluminium  
Tread: Polyurethane 93-95° Shore A, Brown  
Bearing: 6204 Double Precision Ball Bearing  
Threadguard: Without  
Load capacities: 400kg - 600kg  
Diameters: 125 mm - 200 mm  
Temperature Range: -20° C - +60° C



| swivel castor     |    |     |         |           |    |    |     |     |
|-------------------|----|-----|---------|-----------|----|----|-----|-----|
|                   | mm | mm  | mm      | mm        | mm | mm | Kg  |     |
| SHP5EWC125BAU5D0N |    | 125 | 135X110 | 105x84/76 | 11 | 50 | 164 | 400 |
| SHP5EWC160BAU5D0N |    | 160 | 135X110 | 105x84/76 | 11 | 55 | 195 | 500 |
| SHP5EWC200BAU5D0N |    | 200 | 135X110 | 105x84/76 | 11 | 55 | 245 | 600 |



| fixed castor      |    |     |         |           |    |     |     |
|-------------------|----|-----|---------|-----------|----|-----|-----|
|                   | mm | mm  | mm      | mm        | mm | Kg  |     |
| FHP54WC125BAU5D0N |    | 125 | 135X110 | 105x84/76 | 11 | 164 | 400 |
| FHP54WC160BAU5D0N |    | 160 | 135X110 | 105x84/76 | 11 | 195 | 500 |
| FHP54WC200BAU5D0N |    | 200 | 135X110 | 105x84/76 | 11 | 245 | 600 |




| swivel castor with total brake |    |     |         |           |    |    |     |     |     |
|--------------------------------|----|-----|---------|-----------|----|----|-----|-----|-----|
|                                | mm | mm  | mm      | mm        | mm | mm | mm  | Kg  |     |
| THP5EWC125BAU5D0N              |    | 125 | 135X110 | 105x84/76 | 11 | 55 | 164 | 155 | 400 |
| THP5EWC160BAU5D0N              |    | 160 | 135X110 | 105x84/76 | 11 | 55 | 195 | 165 | 500 |
| THP5EWC200BAU5D0N              |    | 200 | 135X110 | 105x84/76 | 11 | 55 | 245 | 165 | 600 |



| wheel only |    |     |    |    |    |     |     |
|------------|----|-----|----|----|----|-----|-----|
|            | mm | mm  | mm | mm | ∅  | Kg  |     |
| 125BAU5D0N |    | 125 | 50 | 60 | 20 | M12 | 500 |
| 160BAU5D0N |    | 160 | 50 | 60 | 20 | M12 | 600 |
| 200BAU5D0N |    | 200 | 50 | 60 | 20 | M12 | 800 |

## CASCOO. Medium Heavy Duty Castors. Series BAF2



Rim: Aluminium  
Tread: High quality elastic 70° Shore A, Grey  
Bearing: 6204 Double Precision Ball Bearing  
Threadguard: Without  
Load capacities: 300kg - 450kg  
Diameters: 125 mm - 200 mm  
Temperature Range: -20° C - +80° C



| swivel castor     |    |     |         |           |    |    |     |     |
|-------------------|----|-----|---------|-----------|----|----|-----|-----|
|                   | mm | mm  | mm      | mm        | mm | mm | Kg  |     |
| SHP57WC125BAF2D0N |    | 125 | 135X110 | 105x84/76 | 11 | 50 | 164 | 300 |
| SHP57WC160BAF2D0N |    | 160 | 135X110 | 105x84/76 | 11 | 55 | 195 | 350 |
| SHP57WC200BAF2D0N |    | 200 | 135X110 | 105x84/76 | 11 | 55 | 245 | 450 |



| fixed castor      |    |     |         |           |    |     |     |
|-------------------|----|-----|---------|-----------|----|-----|-----|
|                   | mm | mm  | mm      | mm        | mm | Kg  |     |
| FHP53WC125BAF2D0N |    | 125 | 135X110 | 105x84/76 | 11 | 164 | 300 |
| FHP53WC160BAF2D0N |    | 160 | 135X110 | 105x84/76 | 11 | 195 | 350 |
| FHP53WC200BAF2D0N |    | 200 | 135X110 | 105x84/76 | 11 | 245 | 450 |




| swivel castor with total brake |    |     |         |           |    |    |     |     |     |
|--------------------------------|----|-----|---------|-----------|----|----|-----|-----|-----|
|                                | mm | mm  | mm      | mm        | mm | mm | mm  | Kg  |     |
| THP57WC125BAF2D0N              |    | 125 | 135X110 | 105x84/76 | 11 | 55 | 164 | 155 | 300 |
| THP57WC160BAF2D0N              |    | 160 | 135X110 | 105x84/76 | 11 | 55 | 195 | 165 | 350 |
| THP57WC200BAF2D0N              |    | 200 | 135X110 | 105x84/76 | 11 | 55 | 245 | 165 | 450 |



| wheel only |    |     |    |    |    |     |     |
|------------|----|-----|----|----|----|-----|-----|
|            | mm | mm  | mm | mm | ∅  | Kg  |     |
| 125BAF2D0N |    | 125 | 50 | 60 | 20 | M12 | 300 |
| 160BAF2D0N |    | 160 | 50 | 60 | 20 | M12 | 400 |
| 200BAF2D0N |    | 200 | 50 | 60 | 20 | M12 | 500 |

## CASCOO. Heavy Duty Castors. Series Z0Z0



Rim: Polyamide PA 6, White  
 Tread: Polyamide PA 6, White  
 Bearing: 6204 Double Precision Ball Bearing  
 Threadguard: Without  
 Load capacities: 800kg - 1000kg  
 Diameters: 150 mm - 200 mm  
 Temperature Range: -40° C - +80° C



| swivel castor     |    |     |         |           |    |    |     |      |
|-------------------|----|-----|---------|-----------|----|----|-----|------|
|                   | mm | mm  | mm      | mm        | mm | mm | mm  | Kg   |
| SHP5KWC150Z0Z0D0N |    | 150 | 135X110 | 105x84/76 | 11 | 55 | 197 | 800  |
| SHP5KWC160Z0Z0D0N |    | 160 | 135X110 | 105x84/76 | 11 | 55 | 202 | 800  |
| SHP5KWC200Z0Z0D0N |    | 200 | 135X110 | 105x84/76 | 11 | 55 | 245 | 1000 |



| fixed castor      |    |     |         |           |    |     |      |
|-------------------|----|-----|---------|-----------|----|-----|------|
|                   | mm | mm  | mm      | mm        | mm | Kg  |      |
| FHP5LWC150Z0Z0D0N |    | 150 | 135X110 | 105x84/76 | 11 | 197 | 800  |
| FHP5LWC160Z0Z0D0N |    | 160 | 135X110 | 105x84/76 | 11 | 202 | 800  |
| FHP5LWC200Z0Z0D0N |    | 200 | 135X110 | 105x84/76 | 11 | 245 | 1000 |



| swivel castor with total brake |    |     |         |           |    |    |     |     |      |
|--------------------------------|----|-----|---------|-----------|----|----|-----|-----|------|
|                                | mm | mm  | mm      | mm        | mm | mm | mm  | Kg  |      |
| THP5KWC150Z0Z0D0N              |    | 150 | 135X110 | 105x84/76 | 11 | 55 | 197 | 165 | 800  |
| THP5KWC160Z0Z0D0N              |    | 160 | 135X110 | 105x84/76 | 11 | 55 | 202 | 195 | 800  |
| THP5KWC200Z0Z0D0N              |    | 200 | 135X110 | 105x84/76 | 11 | 55 | 245 | 195 | 1000 |



| wheel only |    |     |    |    |    |     |      |
|------------|----|-----|----|----|----|-----|------|
|            | mm | mm  | mm | mm | Ø  | Kg  |      |
| 150Z0Z0D0N |    | 150 | 50 | 60 | 20 | M12 | 800  |
| 160Z0Z0D0N |    | 160 | 50 | 60 | 20 | M12 | 800  |
| 200Z0Z0D0N |    | 200 | 50 | 60 | 20 | M12 | 1000 |

## CASCOO. Heavy Duty Castors. Series BAF2



Rim: Aluminium  
 Tread: High Quality Elastic 70° Shore A, Grey  
 Bearing: 6204 Double Precision Ball Bearing  
 Threadguard: Without  
 Load capacities: 300kg - 500kg  
 Diameters: 125 mm - 200 mm  
 Temperature Range: -20° C - +80° C



| swivel castor     |    |     |         |           |    |    |     |     |
|-------------------|----|-----|---------|-----------|----|----|-----|-----|
|                   | mm | mm  | mm      | mm        | mm | mm | mm  | Kg  |
| SHP5KWC125BAF2D0N |    | 125 | 135X110 | 105x84/76 | 11 | 54 | 170 | 300 |
| SHP5KWC160BAF2D0N |    | 160 | 135X110 | 105x84/76 | 11 | 55 | 202 | 400 |
| SHP5KWC200BAF2D0N |    | 200 | 135X110 | 105x84/76 | 11 | 55 | 245 | 500 |



| fixed castor      |    |     |         |           |    |     |     |
|-------------------|----|-----|---------|-----------|----|-----|-----|
|                   | mm | mm  | mm      | mm        | mm | Kg  |     |
| FHP5LWC125BAF2D0N |    | 125 | 135X110 | 105x84/76 | 11 | 170 | 300 |
| FHP5LWC160BAF2D0N |    | 160 | 135X110 | 105x84/76 | 11 | 202 | 400 |
| FHP5LWC200BAF2D0N |    | 200 | 135X110 | 105x84/76 | 11 | 245 | 500 |




| swivel castor with total brake |    |     |         |           |    |    |     |     |     |
|--------------------------------|----|-----|---------|-----------|----|----|-----|-----|-----|
|                                | mm | mm  | mm      | mm        | mm | mm | mm  | Kg  |     |
| THP5KWC125BAF2D0N              |    | 125 | 135X110 | 105x84/76 | 11 | 54 | 170 | 165 | 300 |
| THP5KWC160BAF2D0N              |    | 160 | 135X110 | 105x84/76 | 11 | 55 | 202 | 195 | 400 |
| THP5KWC200BAF2D0N              |    | 200 | 135X110 | 105x84/76 | 11 | 55 | 245 | 195 | 500 |



| wheel only |    |     |    |    |    |     |     |
|------------|----|-----|----|----|----|-----|-----|
|            | mm | mm  | mm | mm | Ø  | Kg  |     |
| 125BAF2D0N |    | 125 | 50 | 60 | 20 | M12 | 300 |
| 160BAF2D0N |    | 160 | 50 | 60 | 20 | M12 | 400 |
| 200BAF2D0N |    | 200 | 50 | 60 | 20 | M12 | 500 |

## CASCOO.Heavy Duty Castors. Series BAU5



Rim: Aluminium  
Tread: Polyurethane 93 -95° Shore A, Brown  
Bearing: 6204 Double Precision Ball Bearing  
Threadguard: Without  
Load capacities: 500kg - 800kg  
Diameters: 125 mm - 200 mm  
Temperature Range: -20° C - +60° C



| swivel castor     |    |     |         |           |    |    |     |     |
|-------------------|----|-----|---------|-----------|----|----|-----|-----|
|                   | mm | mm  | mm      | mm        | mm | mm | mm  | Kg  |
| SHP5KWC125BAU5D0N |    | 125 | 135X110 | 105x84/76 | 11 | 54 | 170 | 500 |
| SHP5KWC160BAU5D0N |    | 160 | 135X110 | 105x84/76 | 11 | 55 | 202 | 600 |
| SHP5KWC200BAU5D0N |    | 200 | 135X110 | 105x84/76 | 11 | 55 | 245 | 800 |



| fixed castor      |    |     |         |           |    |     |     |
|-------------------|----|-----|---------|-----------|----|-----|-----|
|                   | mm | mm  | mm      | mm        | mm | Kg  |     |
| FHP5LWC125BAU5D0N |    | 125 | 135X110 | 105x84/76 | 11 | 170 | 500 |
| FHP5LWC160BAU5D0N |    | 160 | 135X110 | 105x84/76 | 11 | 202 | 600 |
| FHP5LWC200BAU5D0N |    | 200 | 135X110 | 105x84/76 | 11 | 245 | 800 |




| swivel castor with total brake |    |     |         |           |    |    |     |     |     |
|--------------------------------|----|-----|---------|-----------|----|----|-----|-----|-----|
|                                | mm | mm  | mm      | mm        | mm | mm | mm  | Kg  |     |
| THP5KWC125BAU5D0N              |    | 125 | 135X110 | 105x84/76 | 11 | 54 | 170 | 165 | 500 |
| THP5KWC160BAU5D0N              |    | 160 | 135X110 | 105x84/76 | 11 | 55 | 202 | 195 | 600 |
| THP5KWC200BAU5D0N              |    | 200 | 135X110 | 105x84/76 | 11 | 55 | 245 | 195 | 800 |



| wheel only |    |     |    |    |    |     |     |
|------------|----|-----|----|----|----|-----|-----|
|            | mm | mm  | mm | mm | ∅  | Kg  |     |
| 125BAU5D0N |    | 125 | 50 | 60 | 20 | M12 | 500 |
| 160BAU5D0N |    | 160 | 50 | 60 | 20 | M12 | 600 |
| 200BAU5D0N |    | 200 | 50 | 60 | 20 | M12 | 800 |

## CASCOO.Heavy Duty Castors. Series BAX7



Rim: Aluminium  
Tread: PUlastic 75° Shore A, Green  
Bearing: 6204 Double Precision Ball Bearing  
Threadguard: Without  
Load capacities: 500kg - 800kg  
Diameters: 125 mm - 200 mm  
Temperature Range: -20° C - +60° C



| swivel castor     |    |     |         |           |    |    |     |     |
|-------------------|----|-----|---------|-----------|----|----|-----|-----|
|                   | mm | mm  | mm      | mm        | mm | mm | mm  | Kg  |
| SHP5KWC125BAX7D0N |    | 125 | 135X110 | 105x84/76 | 11 | 54 | 170 | 500 |
| SHP5KWC160BAX7D0N |    | 160 | 135X110 | 105x84/76 | 11 | 55 | 202 | 600 |
| SHP5KWC200BAX7D0N |    | 200 | 135X110 | 105x84/76 | 11 | 55 | 245 | 800 |



| fixed castor      |    |     |         |           |    |     |     |
|-------------------|----|-----|---------|-----------|----|-----|-----|
|                   | mm | mm  | mm      | mm        | mm | Kg  |     |
| FHP5LWC125BAX7D0N |    | 125 | 135X110 | 105x84/76 | 11 | 170 | 500 |
| FHP5LWC160BAX7D0N |    | 160 | 135X110 | 105x84/76 | 11 | 202 | 600 |
| FHP5LWC200BAX7D0N |    | 200 | 135X110 | 105x84/76 | 11 | 245 | 800 |




| swivel castor with total brake |    |     |         |           |    |    |     |     |     |
|--------------------------------|----|-----|---------|-----------|----|----|-----|-----|-----|
|                                | mm | mm  | mm      | mm        | mm | mm | mm  | Kg  |     |
| THP5KWC125BAX7D0N              |    | 125 | 135X110 | 105x84/76 | 11 | 54 | 170 | 165 | 500 |
| THP5KWC160BAX7D0N              |    | 160 | 135X110 | 105x84/76 | 11 | 55 | 202 | 195 | 600 |
| THP5KWC200BAX7D0N              |    | 200 | 135X110 | 105x84/76 | 11 | 55 | 245 | 195 | 800 |



| wheel only |    |     |    |    |    |     |     |
|------------|----|-----|----|----|----|-----|-----|
|            | mm | mm  | mm | mm | ∅  | Kg  |     |
| 125BAX7D0N |    | 125 | 50 | 60 | 20 | M12 | 500 |
| 160BAX7D0N |    | 160 | 50 | 60 | 20 | M12 | 600 |
| 200BAX7D0N |    | 200 | 50 | 60 | 20 | M12 | 800 |

**CASCOO. Heavy Duty Castors. Welded Housings.  
Series BAU5**



Rim: Aluminium  
 Tread: Polyurethane 93 -95° Shore A, Orange  
 Bearing: 6204 Double Precision Ball Bearing  
 Threadguard: Without  
 Load capacities: 500kg - 800kg  
 Diameters: 125 mm - 200 mm  
 Temperature Range: -20° C - +60° C



| swivel castor     |    |     |         |           |    |    |     |     |
|-------------------|----|-----|---------|-----------|----|----|-----|-----|
|                   | mm | mm  | mm      | mm        | mm | mm | mm  | Kg  |
| SHP5MWC125BAU5D0N |    | 125 | 135X110 | 105x84/76 | 11 | 50 | 170 | 500 |
| SHP5MWC160BAU5D0N |    | 160 | 135X110 | 105x84/76 | 11 | 57 | 202 | 600 |
| SHP5MWC200BAU5D0N |    | 200 | 135X110 | 105x84/76 | 11 | 59 | 245 | 800 |



| fixed castor      |    |     |         |           |    |     |     |
|-------------------|----|-----|---------|-----------|----|-----|-----|
|                   | mm | mm  | mm      | mm        | mm | Kg  |     |
| FHP5NWC125BAU5D0N |    | 125 | 135X110 | 105x84/76 | 11 | 170 | 500 |
| FHP5NWC160BAU5D0N |    | 160 | 135X110 | 105x84/76 | 11 | 202 | 600 |
| FHP5NWC200BAU5D0N |    | 200 | 135X110 | 105x84/76 | 11 | 245 | 800 |



| swivel castor with back brake |    |     |         |           |    |    |     |       |     |
|-------------------------------|----|-----|---------|-----------|----|----|-----|-------|-----|
|                               | mm | mm  | mm      | mm        | mm | mm | mm  | Kg    |     |
| CHP5MWC125BAU5D0N             |    | 125 | 135X110 | 105x84/76 | 11 | 50 | 170 | 112.5 | 500 |
| CHP5MWC160BAU5D0N             |    | 160 | 135X110 | 105x84/76 | 11 | 57 | 202 | 137   | 600 |
| CHP5MWC200BAU5D0N             |    | 200 | 135X110 | 105x84/76 | 11 | 59 | 245 | 159   | 800 |



| wheel only |    |     |    |    |    |     |     |
|------------|----|-----|----|----|----|-----|-----|
|            | mm | mm  | mm | mm | Ø  | Kg  |     |
| 125BAU5D0N |    | 125 | 50 | 60 | 20 | M12 | 500 |
| 160BAU5D0N |    | 160 | 50 | 60 | 20 | M12 | 600 |
| 200BAU5D0N |    | 200 | 50 | 60 | 20 | M12 | 800 |

**CASCOO. Heavy Duty Castors. Welded Housings.  
Series BAX7**



Rim: Aluminium  
 Tread: PUlastic 75° Shore A, Green  
 Bearing: 6204 Double Precision Ball Bearing  
 Threadguard: Without  
 Load capacities: 500kg - 800kg  
 Diameters: 125 mm - 200 mm  
 Temperature Range: -20° C - +60° C



| swivel castor     |    |     |         |           |    |    |     |     |
|-------------------|----|-----|---------|-----------|----|----|-----|-----|
|                   | mm | mm  | mm      | mm        | mm | mm | mm  | Kg  |
| SHP5MWC125BAX7D0N |    | 125 | 135X110 | 105x84/76 | 11 | 50 | 170 | 500 |
| SHP5MWC160BAX7D0N |    | 160 | 135X110 | 105x84/76 | 11 | 57 | 202 | 600 |
| SHP5MWC200BAX7D0N |    | 200 | 135X110 | 105x84/76 | 11 | 59 | 245 | 800 |



| fixed castor      |    |     |         |           |    |     |     |
|-------------------|----|-----|---------|-----------|----|-----|-----|
|                   | mm | mm  | mm      | mm        | mm | Kg  |     |
| FHP5NWC125BAX7D0N |    | 125 | 135X110 | 105x84/76 | 11 | 170 | 500 |
| FHP5NWC160BAX7D0N |    | 160 | 135X110 | 105x84/76 | 11 | 202 | 600 |
| FHP5NWC200BAX7D0N |    | 200 | 135X110 | 105x84/76 | 11 | 245 | 800 |



| swivel castor with back brake |    |     |         |           |    |    |     |       |     |
|-------------------------------|----|-----|---------|-----------|----|----|-----|-------|-----|
|                               | mm | mm  | mm      | mm        | mm | mm | mm  | Kg    |     |
| CHP5MWC125BAX7D0N             |    | 125 | 135X110 | 105x84/76 | 11 | 50 | 170 | 112.5 | 500 |
| CHP5MWC160BAX7D0N             |    | 160 | 135X110 | 105x84/76 | 11 | 57 | 202 | 137   | 600 |
| CHP5MWC200BAX7D0N             |    | 200 | 135X110 | 105x84/76 | 11 | 59 | 245 | 159   | 800 |



| wheel only |    |     |    |    |    |     |     |
|------------|----|-----|----|----|----|-----|-----|
|            | mm | mm  | mm | mm | Ø  | Kg  |     |
| 125BAX7D0N |    | 125 | 50 | 60 | 20 | M12 | 500 |
| 160BAX7D0N |    | 160 | 50 | 60 | 20 | M12 | 600 |
| 200BAX7D0N |    | 200 | 50 | 60 | 20 | M12 | 800 |

**CASCOO. Heavy Duty Castors. Welded Housings.  
Series Z0Z0**



Rim: Polyamide PA 6, White  
 Tread: Polyamide PA 6, White  
 Bearing: 6204 Double Precision Ball Bearing  
 Threadguard: Without  
 Load capacities: 800kg - 1000kg  
 Diameters: 150 mm - 200 mm  
 Temperature Range: -40° C - +80° C



| swivel castor     |    |     |         |           |    |    |     |      |
|-------------------|----|-----|---------|-----------|----|----|-----|------|
|                   | mm | mm  | mm      | mm        | mm | mm | mm  | Kg   |
| SHP5MWC150Z0Z0D0N |    | 150 | 135X110 | 105x84/76 | 11 | 57 | 197 | 800  |
| SHP5MWC160Z0Z0D0N |    | 160 | 135X110 | 105x84/76 | 11 | 57 | 202 | 800  |
| SHP5MWC200Z0Z0D0N |    | 200 | 135X110 | 105x84/76 | 11 | 59 | 245 | 1000 |



| fixed castor      |    |     |         |           |    |     |      |
|-------------------|----|-----|---------|-----------|----|-----|------|
|                   | mm | mm  | mm      | mm        | mm | Kg  |      |
| FHP5NWC150Z0Z0D0N |    | 150 | 135X110 | 105x84/76 | 11 | 197 | 800  |
| FHP5NWC160Z0Z0D0N |    | 160 | 135X110 | 105x84/76 | 11 | 202 | 800  |
| FHP5NWC200Z0Z0D0N |    | 200 | 135X110 | 105x84/76 | 11 | 245 | 1000 |



| swivel castor with back brake |    |     |         |           |    |    |     |     |      |
|-------------------------------|----|-----|---------|-----------|----|----|-----|-----|------|
|                               | mm | mm  | mm      | mm        | mm | mm | mm  | Kg  |      |
| CHP5MWC150Z0Z0D0N             |    | 150 | 135X110 | 105x84/76 | 11 | 57 | 197 | 132 | 800  |
| CHP5MWC160Z0Z0D0N             |    | 160 | 135X110 | 105x84/76 | 11 | 57 | 202 | 137 | 800  |
| CHP5MWC200Z0Z0D0N             |    | 200 | 135X110 | 105x84/76 | 11 | 59 | 245 | 159 | 1000 |



| wheel only |    |     |    |    |    |     |      |
|------------|----|-----|----|----|----|-----|------|
|            | mm | mm  | mm | mm | Ø  | Kg  |      |
| 150Z0Z0D0N |    | 150 | 50 | 60 | 20 | M12 | 800  |
| 160Z0Z0D0N |    | 160 | 50 | 60 | 20 | M12 | 800  |
| 200Z0Z0D0N |    | 200 | 50 | 60 | 20 | M12 | 1000 |

**CASCOO. Heavy Duty Castors. Welded Housings.  
Series I2U5**



Rim: Cast Iron  
 Tread: Polyurethane 93° Shore A, Brown  
 Bearing: 6204 Double Precision Ball Bearing  
 Threadguard: Without  
 Load capacities: 700kg - 1000kg  
 Diameters: 125 mm - 200 mm  
 Temperature Range: -20° C - +60° C



| swivel castor     |    |     |         |           |    |    |     |      |
|-------------------|----|-----|---------|-----------|----|----|-----|------|
|                   | mm | mm  | mm      | mm        | mm | mm | mm  | Kg   |
| SHP5MWC125I2U5D0N |    | 125 | 135X110 | 105x84/76 | 11 | 50 | 170 | 700  |
| SHP5MWC160I2U5D0N |    | 160 | 135X110 | 105x84/76 | 11 | 57 | 202 | 800  |
| SHP5MWC200I2U5D0N |    | 200 | 135X110 | 105x84/76 | 11 | 59 | 245 | 1000 |



| fixed castor      |    |     |         |           |    |     |      |
|-------------------|----|-----|---------|-----------|----|-----|------|
|                   | mm | mm  | mm      | mm        | mm | Kg  |      |
| FHP5NWC125I2U5D0N |    | 125 | 135X110 | 105x84/76 | 11 | 170 | 700  |
| FHP5NWC160I2U5D0N |    | 160 | 135X110 | 105x84/76 | 11 | 202 | 800  |
| FHP5NWC200I2U5D0N |    | 200 | 135X110 | 105x84/76 | 11 | 245 | 1000 |



| swivel castor with back brake |    |     |         |           |    |    |     |       |      |
|-------------------------------|----|-----|---------|-----------|----|----|-----|-------|------|
|                               | mm | mm  | mm      | mm        | mm | mm | mm  | Kg    |      |
| CHP5MWC125I2U5D0N             |    | 125 | 135X110 | 105x84/76 | 11 | 50 | 170 | 112.5 | 700  |
| CHP5MWC160I2U5D0N             |    | 160 | 135X110 | 105x84/76 | 11 | 57 | 202 | 137   | 800  |
| CHP5MWC200I2U5D0N             |    | 200 | 135X110 | 105x84/76 | 11 | 59 | 245 | 159   | 1000 |



| wheel only |    |     |    |    |    |     |      |
|------------|----|-----|----|----|----|-----|------|
|            | mm | mm  | mm | mm | Ø  | Kg  |      |
| 125I2U5D0N |    | 125 | 50 | 60 | 20 | M12 | 700  |
| 160I2U5D0N |    | 160 | 50 | 60 | 20 | M12 | 800  |
| 200I2U5D0N |    | 200 | 50 | 60 | 20 | M12 | 1000 |



CASCOO. Stainless Steel Castors.



Do you get upset to your castor application for rust, lower class & poor looking?  
Change to CASCOO - a cutting edge stainless steel castor. Which will give you  
not only excellent castor function but also cheerful face on your equipment.

**CASCOO. Stainless Steel Castors. CASCOO Innovation.  
Series NON0L0N**



Rim: Polyamide  
Tread: Polyamide  
Bearing: Plain bearing in stainless steel  
Threadguard: Without  
Load capacities: 130kg - 200kg  
Diameters: 80 mm - 125 mm  
Temperature Range: - 20° C - + 60° C



| swivel castor     | mm  | mm    | mm       | mm | mm | mm  | Kg  |
|-------------------|-----|-------|----------|----|----|-----|-----|
| SIP26SC080NON0L0N | 080 | 96X80 | 80/77x60 | 9  | 36 | 108 | 130 |
| SIP26SC100NON0L0N | 100 | 96X80 | 80/77x60 | 9  | 36 | 128 | 150 |
| SIP36SC125NON0L0N | 125 | 96X80 | 80/77x60 | 9  | 36 | 155 | 200 |



| fixed castor      | mm  | mm    | mm       | mm | mm  | Kg  |
|-------------------|-----|-------|----------|----|-----|-----|
| FIP22SC080NON0L0N | 080 | 96X80 | 80/77x60 | 9  | 108 | 130 |
| FIP22SC100NON0L0N | 100 | 96X80 | 80/77x60 | 9  | 128 | 150 |
| FIP32SC125NON0L0N | 125 | 96X80 | 80/77x60 | 9  | 155 | 200 |



| swivel castor with total brake | mm  | mm    | mm       | mm | mm | mm  | mm  | Kg  |
|--------------------------------|-----|-------|----------|----|----|-----|-----|-----|
| TIP26SC080NON0L0N              | 080 | 96X80 | 80/77x60 | 9  | 36 | 108 | 115 | 130 |
| TIP26SC100NON0L0N              | 100 | 96X80 | 80/77x60 | 9  | 36 | 128 | 115 | 150 |
| TIP36SC125NON0L0N              | 125 | 96X80 | 80/77x60 | 9  | 45 | 155 | 120 | 200 |

**CASCOO. Stainless Steel Castors. CASCOO Innovation.  
Series NON0L0N**



Rim: Polyamide  
Tread: Polyamide  
Bearing: Plain bearing in stainless steel  
Threadguard: Without  
Load capacities: 130kg - 200kg  
Diameters: 80 mm - 125 mm  
Temperature Range: - 20° C - + 60° C



| swivel castor with bolt hole | mm  | mm | mm | mm  | Kg  |
|------------------------------|-----|----|----|-----|-----|
| HIH36SC080NON0L0N            | 080 | 13 | 36 | 106 | 130 |
| HIH36SC100NON0L0N            | 100 | 13 | 36 | 126 | 150 |
| HIH86SC125NON0L0N            | 125 | 13 | 40 | 153 | 200 |



| swivel castor with bolt hole total brake | mm  | mm | mm | mm  | mm  | Kg  |
|--|-----|----|----|-----|-----|-----|
| BIH36SC080NON0L0N                        | 080 | 13 | 36 | 106 | 115 | 130 |
| BIH36SC100NON0L0N                        | 100 | 13 | 36 | 126 | 115 | 150 |
| BIH86SC125NON0L0N                        | 125 | 13 | 45 | 153 | 120 | 200 |



| wheel only | mm  | mm | mm | mm | Ø  | Kg  |
|------------|-----|----|----|----|----|-----|
| 080NON0L0N | 080 | 32 | 40 | 12 | M8 | 130 |
| 100NON0L0N | 100 | 32 | 40 | 12 | M8 | 150 |
| 125NON0L0N | 125 | 32 | 50 | 12 | M8 | 200 |

**CASCOO. Stainless Steel Castors. CASCOO Innovation.  
Series N2U6Q0N**



Rim: Polyamide  
Tread: Thermoplastic Polyurethane 95° Shore A  
Bearing: Roller bearing in stainless steel  
Threadguard: Without  
Load capacities: 130kg - 200kg  
Diameters: 80 mm - 125 mm  
Temperature Range: - 20° C - + 60° C



| swivel castor     |     |       |          |    |    |     |    |     |
|-------------------|-----|-------|----------|----|----|-----|----|-----|
|                   | mm  | mm    | mm       | mm | mm | mm  | mm | Kg  |
| SIP26SC080N2U6Q0N | 080 | 96X80 | 80/77x60 | 9  | 36 | 108 |    | 130 |
| SIP26SC100N2U6Q0N | 100 | 96X80 | 80/77x60 | 9  | 36 | 128 |    | 150 |
| SIP36SC125N2U6Q0N | 125 | 96X80 | 80/77x60 | 9  | 36 | 155 |    | 200 |



| fixed castor      |     |       |          |    |     |     |
|-------------------|-----|-------|----------|----|-----|-----|
|                   | mm  | mm    | mm       | mm | mm  | Kg  |
| FIP22SC080N2U6Q0N | 080 | 96X80 | 80/77x60 | 9  | 108 | 130 |
| FIP22SC100N2U6Q0N | 100 | 96X80 | 80/77x60 | 9  | 128 | 150 |
| FIP32SC125N2U6Q0N | 125 | 96X80 | 80/77x60 | 9  | 155 | 200 |



| swivel castor with total brake |     |       |          |    |    |     |     |     |
|--------------------------------|-----|-------|----------|----|----|-----|-----|-----|
|                                | mm  | mm    | mm       | mm | mm | mm  | mm  | Kg  |
| TIP26SC080N2U6Q0N              | 080 | 96X80 | 80/77x60 | 9  | 36 | 108 | 115 | 130 |
| TIP26SC100N2U6Q0N              | 100 | 96X80 | 80/77x60 | 9  | 36 | 128 | 115 | 150 |
| TIP36SC125N2U6Q0N              | 125 | 96X80 | 80/77x60 | 9  | 36 | 155 | 120 | 200 |

**CASCOO. Stainless Steel Castors. CASCOO Innovation.  
Series N2U6Q0N**



Rim: Polyamide  
Tread: Thermoplastic Polyurethane 95° Shore A  
Bearing: Roller bearing in stainless steel  
Threadguard: Without  
Load capacities: 130kg - 200kg  
Diameters: 80 mm - 125 mm  
Temperature Range: - 20° C - + 60° C



| swivel castor with bolt hole |     |    |    |     |    |     |
|------------------------------|-----|----|----|-----|----|-----|
|                              | mm  | mm | mm | mm  | mm | Kg  |
| HIH36SC080N2U6Q0N            | 080 | 13 | 36 | 106 |    | 130 |
| HIH36SC100N2U6Q0N            | 100 | 13 | 36 | 126 |    | 150 |
| HIH86SC125N2U6Q0N            | 125 | 13 | 40 | 153 |    | 200 |




| swivel castor with bolt hole total brake |     |    |    |     |     |     |
|--|-----|----|----|-----|-----|-----|
|  | mm  | mm | mm | mm  | mm  | Kg  |
| BIH36SC080N2U6Q0N                        | 080 | 13 | 40 | 106 | 115 | 130 |
| BIH36SC100N2U6Q0N                        | 100 | 13 | 40 | 126 | 115 | 150 |
| BIH86SC125N2U6Q0N                        | 125 | 13 | 45 | 153 | 120 | 200 |



| wheel only |     |    |    |    |    |     |
|------------|-----|----|----|----|----|-----|
|            | mm  | mm | mm | mm | Ø  | Kg  |
| 080N2U6Q0N | 080 | 32 | 40 | 12 | M8 | 130 |
| 100N2U6Q0N | 100 | 32 | 40 | 12 | M8 | 150 |
| 125N2U6Q0N | 125 | 32 | 50 | 15 | M8 | 200 |

**CASCOO. Stainless Steel Castors. CASCOO Innovation.**  
**Series R4E2Q0N / R4E2S34**



Rim: Polyamide  
 Tread: High Quality Grey Elastic 65° Shore A  
 Bearing: Roller bearing / Single ball bearing in stainless steel  
 Threadguard: Without / Small plastic threadguard  
 Load capacities: 160kg - 200kg  
 Diameters: 100 mm - 125 mm  
 Temperature Range: - 20° C - + 60° C



| swivel castor                          |    |       |          |    |    |     |     |
|--|----|-------|----------|----|----|-----|-----|
|  | mm | mm    | mm       | mm | mm | mm  | Kg  |
| SIP26SC100R4E2Q0N<br>SIP26SC100R4E2S34 |    | 96X80 | 80/77x60 | 9  | 36 | 128 | 160 |
| SIP36SC125R4E2Q0N<br>SIP36SC125R4E2S34 |    | 96X80 | 80/77x60 | 9  | 40 | 155 | 200 |



| fixed castor                           |    |       |          |    |     |
|--|----|-------|----------|----|-----|
|  | mm | mm    | mm       | mm | Kg  |
| FIP22SC100R4E2Q0N<br>FIP22SC100R4E2S34 |    | 96X80 | 80/77x60 | 9  | 128 |
| FIP32SC125R4E2Q0N<br>FIP32SC125R4E2S34 |    | 96X80 | 80/77x60 | 9  | 155 |



| swivel castor with total brake         |    |       |          |    |    |     |     |
|--|----|-------|----------|----|----|-----|-----|
|  | mm | mm    | mm       | mm | mm | mm  | Kg  |
| TIP26SC100R4E2Q0N<br>TIP26SC100R4E2S34 |    | 96X80 | 80/77x60 | 9  | 36 | 128 | 160 |
| TIP36SC125R4E2Q0N<br>TIP36SC125R4E2S34 |    | 96X80 | 80/77x60 | 9  | 40 | 155 | 200 |

**CASCOO. Stainless Steel Castors. CASCOO Innovation.**  
**Series R4E2Q0N / R4E2S34**



Rim: Polyamide  
 Tread: High Quality Grey Elastic 65° Shore A  
 Bearing: Roller bearing / Single ball bearing in stainless steel  
 Threadguard: Without / Small plastic threadguard  
 Load capacities: 160kg - 200kg  
 Diameters: 100 mm - 125 mm  
 Temperature Range: - 20° C - + 60° C



| swivel castor with bolt hole           |    |    |    |     |
|--|----|----|----|-----|
|  | mm | mm | mm | Kg  |
| HIH36SC100R4E2Q0N<br>HIH36SC100R4E2S34 |    | 13 | 36 | 126 |
| HIH86SC125R4E2Q0N<br>HIH86SC125R4E2S34 |    | 13 | 40 | 153 |



| swivel castor with bolt hole total brake |    |    |    |     |     |     |    |
|--|----|----|----|-----|-----|-----|----|
|  | mm | mm | mm | mm  | mm  | mm  | Kg |
| BIH36SC100R4E2Q0N<br>BIH36SC100R4E2S34   |    | 13 | 36 | 126 | 115 | 150 |    |
| BIH86SC125R4E2Q0N<br>BIH86SC125R4E2S34   |    | 13 | 40 | 153 | 120 | 150 |    |



| wheel only               |    |    |    |    |    |     |
|--------------------------|----|----|----|----|----|-----|
|                          | mm | mm | mm | mm | Ø  | Kg  |
| 100R4E2Q0N<br>100R4E2S34 |    | 35 | 40 | 12 | M8 | 160 |
| 125R4E2Q0N<br>125R4E2S34 |    | 38 | 50 | 15 | M8 | 200 |



CASCOO. Waste Bin Castors.




The disposal of waste requires heavy castor but not poor wheels. An easy moving wheel is important for large & heavy waste bin application.

**CASCOO. Waste Bin Castors.  
Series P4S4**



Rim: Polypropylene  
Tread: Solid Rubber 85° Shore A  
Bearing: Nylon Plain Bearing  
Threadguard: Without  
Load capacities: 175kg - 200kg  
Diameters: 160 mm - 200 mm  
Temperature Range: -20° C - +60° C



| swivel castor     | mm  | mm      | mm        | mm | mm | mm  | Kg  |
|-------------------|-----|---------|-----------|----|----|-----|-----|
| SWP58WC160P4S4P0N | 160 | 135X110 | 105x84/76 | 11 | 52 | 195 | 175 |
| SWP58WC200P4S4P0N | 200 | 135X110 | 105x84/76 | 11 | 55 | 238 | 205 |



| swivel castor<br>back brake with hook | mm  | mm      | mm        | mm | mm | mm  | Kg  |
|---------------------------------------|-----|---------|-----------|----|----|-----|-----|
| CWP58WC200P4S4P0N                     | 200 | 135X110 | 105x84/76 | 11 | 55 | 238 | 205 |



| swivel castor<br>back brake with screw | mm  | mm      | mm        | mm | mm | mm  | Kg  |
|--|-----|---------|-----------|----|----|-----|-----|
| AWP58WC160P4S4P0N                      | 160 | 135X110 | 105x84/76 | 11 | 52 | 195 | 175 |
| AWP58WC200P4S4P0N                      | 200 | 135X110 | 105x84/76 | 11 | 55 | 238 | 205 |




| wheel only | mm  | mm | mm | mm | Ø   | Kg  |
|------------|-----|----|----|----|-----|-----|
| 160P4S4P0N | 160 | 50 | 60 | 20 | M12 | 175 |
| 200P4S4P0N | 200 | 50 | 60 | 20 | M12 | 205 |

**CASCOO. Waste Bin Castors.  
Series SBS4**



Rim: Steel Sheet  
Tread: Solid Rubber 85° Shore A  
Bearing: Roller Bearing  
Threadguard: Without  
Load capacities: 205kg  
Diameters: 200 mm  
Temperature Range: -20° C - +60° C



| swivel castor     | mm  | mm      | mm        | mm | mm | mm  | Kg  |
|-------------------|-----|---------|-----------|----|----|-----|-----|
| SWP58WC200SBS4R0N | 200 | 135X110 | 105x84/76 | 11 | 55 | 238 | 205 |



| swivel castor<br>back brake with hook | mm  | mm      | mm        | mm | mm | mm  | Kg  |
|---------------------------------------|-----|---------|-----------|----|----|-----|-----|
| CWP58WC200SBS4R0N                     | 200 | 135X110 | 105x84/76 | 11 | 55 | 238 | 205 |



| swivel castor<br>back brake with screw | mm  | mm      | mm        | mm | mm | mm  | Kg  |
|--|-----|---------|-----------|----|----|-----|-----|
| AWP58WC200SBS4R0N                      | 200 | 135X110 | 105x84/76 | 11 | 55 | 238 | 205 |



| wheel only | mm  | mm | mm | mm | Ø   | Kg  |
|------------|-----|----|----|----|-----|-----|
| 200SBS4R0N | 200 | 50 | 60 | 20 | M12 | 205 |

**CASCOO. Waste Bin Castors.  
Series P4S4**



Rim: Polypropylene  
 Tread: Solid Rubber 85° Shore A  
 Load capacities: 100kg  
 Diameters: 200 mm  
 Temperature Range: - 20° C - + 60° C



| wheel for waste bin |  mm |  mm |  mm |  mm |  mm |  Kg |
|---------------------|--|--|--|--|--|--|
| 200P4S4Z0N          | 200  | 50   |  |  | ∅  | 100  |



| solid axle for waste bin |  mm |  mm |
|--------------------------|--|--|
| A460S0                   | 460  | 21.5   |
| A552S0                   | 552  | 21.5   |



| semi-hollow axle for waste bin |  mm |  mm |  mm |
|--------------------------------|--|--|--|
| A460SE20                       | 460  | 21.5   | 2.0  |
| A552SE20                       | 552  | 21.5   | 2.0  |



| hollow axle for waste bin |  mm |  mm |  mm |
|---------------------------|--|--|--|
| A460HO18                  | 460  | 21.5   | 1.8  |
| A552HO18                  | 552  | 21.5   | 1.8  |
| A460HO25                  | 460  | 21.5   | 2.5  |
| A552HO25                  | 552  | 21.5   | 2.5  |





## Explanation of the Part No.

|          |          |               |                |           |                   |          |          |            |                  |             |                   |               |             |                   |          |          |
|----------|----------|---------------|----------------|-----------|-------------------|----------|----------|------------|------------------|-------------|-------------------|---------------|-------------|-------------------|----------|----------|
| 1        | 2        | 3             | 4              | 5         | 6                 | 7        | 8        | 9          | 10               | 11          | 12                | 13            | 14          | 15                | 16       | 17       |
| <b>S</b> | <b>A</b> | <b>P</b>      | <b>A</b>       | <b>9</b>  | <b>C</b>          | <b>C</b> | <b>0</b> | <b>5</b>   | <b>0</b>         | <b>P</b>    | <b>2</b>          | <b>T</b>      | <b>2</b>    | <b>P</b>          | <b>0</b> | <b>N</b> |
| Fork     | Category | Mounting Type | Mounting Spec. | Thickness | Surface treatment | Logo     | Wheel Ø  | Wheel Core | Wheel Core Color | Wheel Tread | Wheel Tread color | Wheel bearing | Threadguard | Threadguard color |          |          |

### 1. Fork (Housing) Type

|   |   |
|---|---|
| A | Swivel with back brake(adjustable screw)            |
| B | Bolt hole with total brake                          |
| C | Swivel with back brake(hook)                        |
| D | Swivel with directional brake                       |
| E | Swivel with hole fitting and directional brake      |
| F | Fixed   |
| H | Swivel with hole fitting                            |
| K | Swivel with hole fitting/total brake(plastic pedal) |
| P | Swivel with total brake(plastic pedal)              |
| S | Swivel  |
| T | Swivel with total brake                             |

### 2. Castor Category

|   |                       |
|---|-----------------------|
| A | Apparatus castors     |
| B | Cascoo basics         |
| D | Apparatus twin wheels |
| E | Shopping trolleys     |
| F | Cascoo flex           |
| H | Heavy duty            |
| I | Cascoo innovation     |
| P | Cascoo premium        |
| S | Special version       |
| W | Waste bin             |

### 3. Mounting Type

|   |                                   |
|---|-----------------------------------|
| B | Screw and ball bearing            |
| C | Screw and ball bearing with stage |
| H | Bolt hole                         |
| P | Fixing plate                      |
| S | Bolt hole with screw              |
| Z | Bolt hole with stem               |

### 4. Mounting Spec.

|            |                                |
|------------|--------------------------------|
| When 3 = p |                                |
| 1          |                                |
| 2          | 80x60 mm / 42mm                |
| 3          | 80x60 mm / 52mm                |
| 4          | 105x80 mm / 52mm               |
| 5          | 105x80 mm / 60mm               |
| 6          | 80 x 60 mm strengthend / 42 mm |
| 7          | 80x60 mm closed / 42mm         |
| 8          | 85x60 mm/42mm                  |
| 9          | 80x60 mm/46mm                  |
| A          | 60x60 mm / 28mm                |
| B          | 55x55 mm / 22mm                |
| C          | 67x60 mm / 28mm                |
| E          | 77x67 mm / 36mm                |
| G          | Special version                |
| J          | 95 x 70 mm / 36 mm             |
| R          | Special version ried           |
| T          | Special version transoplast    |

### Hollow/Stem Size

|                            |                       |
|----------------------------|-----------------------|
| When 3 = h / z / s / b / c |                       |
| 0                          | 10mm                  |
| 1                          | 11 mm / 22-36mm       |
| 2                          | 12 mm / 22-36mm       |
| 3                          | 13 mm/42              |
| 4                          | 14 mm                 |
| 5                          | 15 mm                 |
| 6                          | 16 mm                 |
| 7                          | 7 mm                  |
| 8                          | 13 mm/52mm            |
| 9                          | 13 mm/60mm            |
| A                          | 13 mm/36mm            |
| B                          | 13 mm/36 strengthened |
| C                          | 12,2mm                |
| G                          |                       |
| H                          | 11mm/44mm             |
| J                          | 11mm/56mm             |

### 5. Top Plate/Fork Thickness

|   |           |
|---|-----------|
| 0 | 2.00/1.50 |
| 1 | 3.00/2.50 |
| 2 | 2.00/2.00 |
| 3 | 3.00/3.00 |
| 4 | 4.00/4.00 |
| 5 | 2.50/2.50 |
| 6 | 2.50/2.00 |
| 7 | 4.00/3.00 |
| 8 | 3.50/3.00 |
| 9 | 2.00/1.80 |
| A | 3.50/3.50 |
| B | 4.00/3.50 |
| C | 1.50/1.50 |
| D | 3.00/2.00 |
| E | 5.00/4.00 |
| F | 2.75/2.25 |
| G | 1.80/1.80 |
| H | 1.50/2.00 |
| J | 2.00/2.50 |
| K | 6.00/5.00 |
| L | 5.00/5.00 |
| M | 8.00/6.00 |
| N | 6.00/6.00 |

### 6. Fork Surface Treatment

|   |  |
|---|--|
| A | Galv. Blue zinc/ral 9007 powdercoated  |
| B | Galv. Blue zinc and black powdercoated |
| C | Zinc-chromatised                       |
| K | Cathodic dip (KTL)                     |
| S | Stainless steel                        |
| W | Galvanized blue zinc                   |
| Y | Galvanized yellow zinc                 |

### 7. Logo

|   |              |
|---|--------------|
| 0 | Without logo |
| C | Cascoo logo  |

### 8.9.10. Wheel Ø

|     |          |
|-----|----------|
| 050 | Ø 50 mm  |
| 075 | Ø 75 mm  |
| 080 | Ø 80 mm  |
| 100 | Ø 100 mm |
| 108 | Ø 108 mm |
| 125 | Ø 125 mm |
| 150 | Ø 150 mm |
| 160 | Ø 160 mm |
| 180 | Ø 180 mm |
| 200 | Ø 200 mm |
| 250 | Ø 250 mm |

### 11. Wheel Core

|   |                            |
|---|----------------------------|
| A | Aluminum                   |
| B | Aluminum (heavy duty)      |
| H | Polyamide (steel tube)     |
| I | Iron rim                   |
| J | Polyamide (heat resistant) |
| K | Steel rim (for M8)         |
| M | Sandwich polyamide         |
| N | Polyamide                  |
| P | Polypropylene              |
| Q | Polypropylene (steel tube) |
| R | Polyamide                  |
| S | Steel rim                  |
| T | Sandwich polypropylene     |
| U | Polyurethane               |
| X | Polypropylene (for M8)     |
| Y | Polyamide (for M8)         |
| Z | Polyamide (heavy duty)     |

### 12. Wheel Center Color

|   |                                 |
|---|---------------------------------|
| 0 | White                           |
| 1 | Blue                            |
| 2 | Grey                            |
| 3 | Yellow                          |
| 4 | Black                           |
| 5 | Brown                           |
| 6 | Red                             |
| 7 | Green                           |
| 8 | Orange                          |
| 9 | Special (see explanatory notes) |

### 13. Wheel Tread

|   |  |
|---|--|
| A | Thermopl. Rubber                         |
| D | Thermopl. Rubber 65° shore A             |
| E | Elastic 65° shore A                      |
| F | Elastic 70-75° shore A                   |
| G | Thermopl. Rubber 65° shore A             |
| H |  |
| J | Thermopl. Rubber 85° shore A             |
| K | Oil-resistant elastic                    |
| L | Thermopl. Rubber (ESD)                   |
| N | Polyamide                                |
| P | Polypropylene                            |
| R | Solid rubber (PAH conformity)            |
| S | Solid rubber (REACH conformity)          |
| T | Thermopl. Rubber 95° shore A             |
| U | Polyurethane                             |
| V | Thermopl. Rubber 85° shore A(thin tyre)  |
| W | Thermopl. Rubber 85° shore A(thick tyre) |
| X | Pulastic 75° shore A                     |
| Z | Polyamide (heavy duty)                   |

### 14. Wheel Tread Color

|   |                                 |
|---|---------------------------------|
| 0 | White                           |
| 1 | Blue                            |
| 2 | Grey                            |
| 3 | Yellow                          |
| 4 | Black                           |
| 5 | Brown                           |
| 6 | Red                             |
| 7 | Green                           |
| 8 | Orange                          |
| 9 | Special (see explanatory notes) |

### 15. Wheel Bearing

|   |                                   |
|---|-----------------------------------|
| B | Single ball bearing               |
| D | Double ball bearing               |
| P | Plain bearing                     |
| Q | Roller bearing (stainless steel)  |
| R | Roller bearing                    |
| S | Ball bearing (stainless steel)    |
| Z | Plain bearing (with plastic bush) |
| L | Plain bearing (stainless steel)   |

### 16. Threadguard

|   |                                   |
|---|-----------------------------------|
| 0 | No separate threadguard           |
| 1 | Small metal threadguard           |
| 2 | Full covering metal threadguard   |
| 3 | Small plastic threadguard         |
| 4 | Full covering plastic threadguard |

### 17. Threadguard Color

|   |                                 |
|---|---------------------------------|
| 0 | White                           |
| 1 | Blue                            |
| 2 | Grey                            |
| 3 | Yellow                          |
| 4 | Black                           |
| 5 | Brown                           |
| 6 | Red                             |
| 7 | Green                           |
| 8 | Orange                          |
| 9 | Special (see explanatory notes) |
| C | Zinc-chromatised                |
| N | Threadguard                     |
| S | Stainless steel                 |
| W | Zinc blue                       |
| Y | Zinc yellow                     |